


LED DOWNLIGHT

S9074TC, S9075TC, S9076TC PREMIER



DIMENSIONS

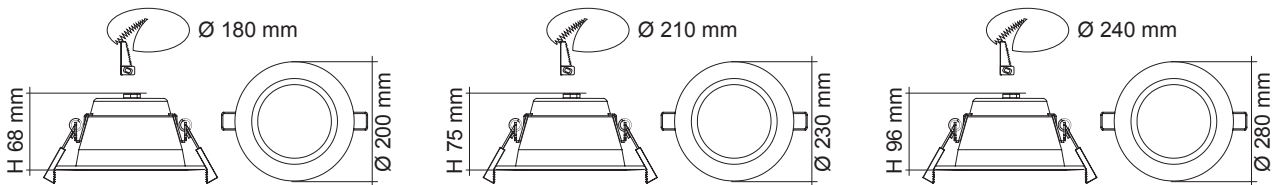

CONSTRUCTION

- Premium aluminium body
- Powder coated finish
- Opal acrylic diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver fitted
- 1.2m flex & plug fitted

IP RATING

- IP64 weatherproof front only


DIMMING OPTIONS

- Trailing edge (S9074 & S9075)
- 1-10V analogue
- DALI / DSI, digital


| Model No. | Input | Power | Lumen | CCT | Beam Angle | CRI | Dimmable | Fitting Colour |
|------------|-------|-------|----------------------|-------------------|------------|-----|----------|----------------|
| S9074TC WH | 240V | 20W | 1600lm/1800lm/1800lm | 3000K/4000K/5700K | 90° | >80 | No | White |
| S9075TC WH | 240V | 30W | 2600lm/2800lm/2800lm | 3000K/4000K/5700K | 90° | >80 | No | White |
| S9076TC WH | 240V | 40W | 3600lm/3900lm/3900lm | 3000K/4000K/5700K | 90° | >80 | No | White |

PHOTOMETRIC DATA (AT CCT 4000K) Unit: cd C0/C180 — C90/C270

S9074TC at 4000K



S9075TC at 4000K



S9076TC at 4000K

