

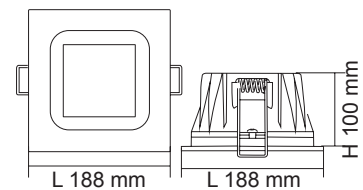

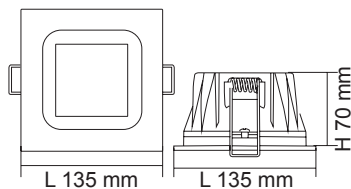



LED SQUARE DOWNLIGHT

S9651 PUNNET

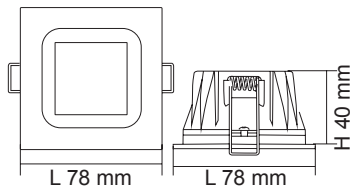

DIMENSIONS



CONSTRUCTION

- Square bezel combined with round body to suit round cut out
- Deep recessed angle fitting enables good glare control and light effect
- Die Cast Aluminium body
- Matt powder coated finish
- High efficiency SMD LED chips
- High efficiency prismatic diffuser
- Constant current non-dimmable LED driver fitted
- Trailing edge dimmable models available
- 1.2 m flex & 2 pin plug fitted

IP RATING

- IP44 weatherproof front only

COLOUR TEMPERATURE

- 4000K Cool White (standard)
- 3000K Warm White (option)
- 5000K Neutral Daylight (option)

DIMMING OPTIONS

- Trailing edge (excluding S9651/175CW/WH50W)
- 1-10V analogue
- DALI / DSI, digital




Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Fitting Colour
S9651/70CW/WH7W	240V	7W	800lm	4000K	80°	>80	Yes*	Matt White
S9651/70CW/WH10W	240V	10W	1000lm	4000K	80°	>80	Yes*	Matt White
S9651/125CW/WH20W	240V	20W	2000lm	4000K	80°	>80	No	Matt White
S9651/125CW/WH30W	240V	30W	2800lm	4000K	80°	>80	No	Matt White
S9651/175CW/WH35W	240V	35W	3500lm	4000K	80°	>80	No	Matt White
S9651/175CW/WH50W	240V	50W	4800lm	4000K	80°	>80	No	Matt White


* Trailing edge dimming

PHOTOMETRIC DATA Unit: cd C0/C180

S9651/70CW/WH7W



S9651/125CW/WH20W



S9651/175CW/WH35W

