


LED SQUARE DOWNLIGHT

S9691 BENTO



DIMENSIONS

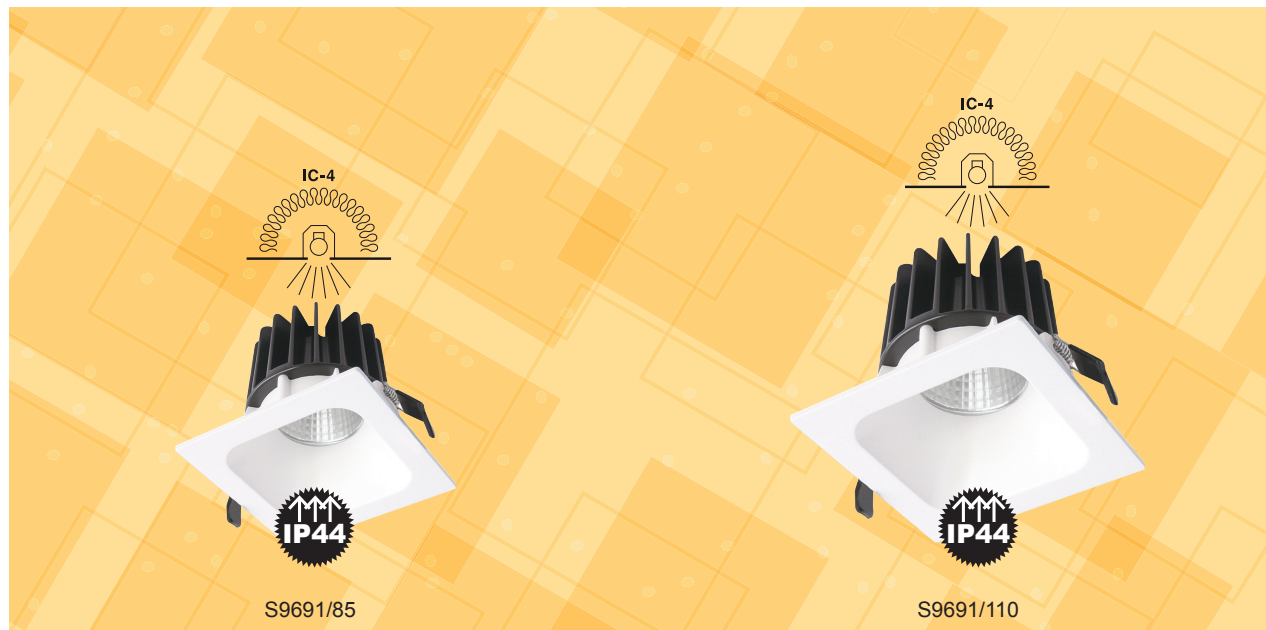

CONSTRUCTION

- Square bezel combined with round body to suit round cut out
- Deep recessed angle fitting enables good glare control and light effect
- Die Cast Aluminium body
- Matt powder coated finish
- High output COB LED chip
- Changeable multi-reflector system
- Constant current non-dimmable LED driver fitted
- 1.2 m flex & 2 pin plug fitted

IP RATING

- IP44 weatherproof front only

FITTING COLOUR

- Matt white (standard)
- Black, Silver (option)

BEAM ANGLE


- S9691/85, S9691/110: 36° (standard)
- S9691/135, S9691/160: 30° (standard)
- S9691/85, S9691/110: 15°, 24°, 50° (option)
- S9691/135, S9691/160 : 10°, 20°, 40°, 70° (option)

COLOUR TEMPERATURE

- 4000K Cool White (standard)
- 3000K Warm White (option)
- 5000K Neutral Daylight (option)

DIMMING OPTIONS

- Trailing edge (excluding S9691/135, S9691/160)
- 1-10V analogue
- DALI / DSI, digital

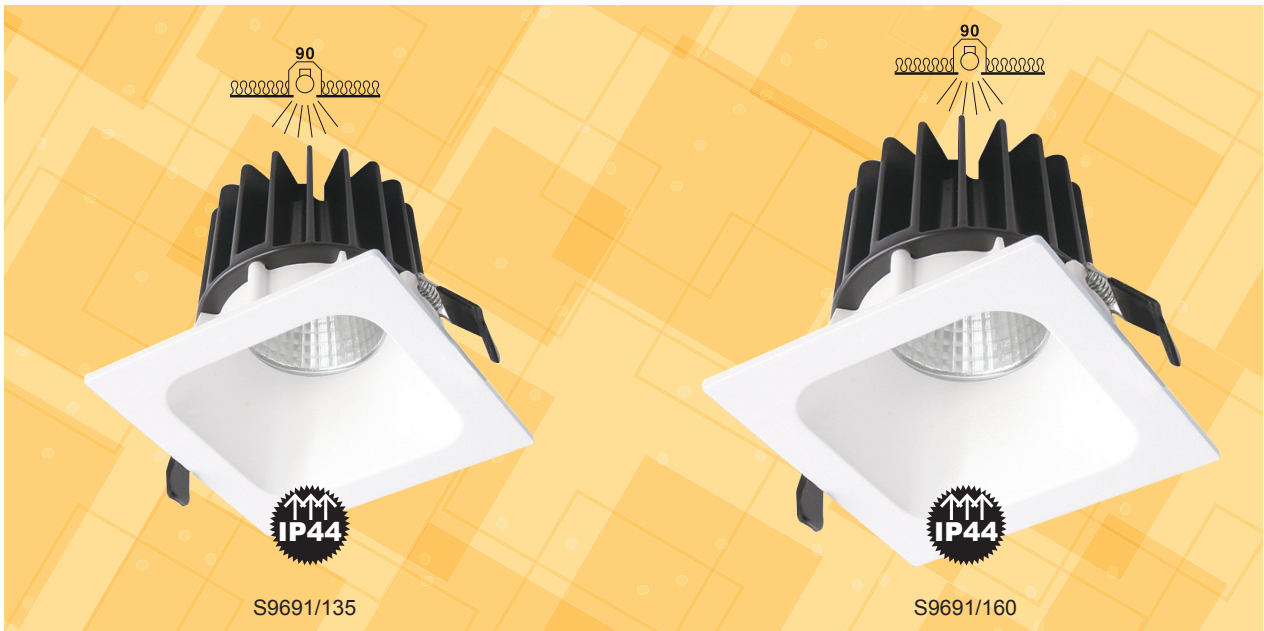


DIMENSIONS



Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Cut Out Ø	Dimensions L x H
S9691/85/7CW	240V	5W	700lm	4000K	36°	>80	Matt White	75	85 x 76 mm
S9691/85/10CW	240V	8W	1000lm	4000K	36°	>80	Matt White	75	85 x 76 mm
S9691/110/15CW	240V	13W	1500lm	4000K	36°	>80	Matt White	100	110 x 92 mm
S9691/135/34CW	240V	27W	3400lm	4000K	30°	>80	Matt White	125	135 x 127 mm
S9691/135/42CW	240V	34W	4200lm	4000K	30°	>80	Matt White	125	135 x 127 mm
S9691/135/49CW	240V	38W	4900lm	4000K	30°	>80	Matt White	125	135 x 127 mm
S9691/160/42CW	240V	34W	4200lm	4000K	30°	>80	Matt White	150	160 x 134 mm
S9691/160/49CW	240V	38W	4900lm	4000K	30°	>80	Matt White	150	160 x 134 mm

PHOTOMETRIC DATA UNIT: cd C0/C180 — C90/C270 —

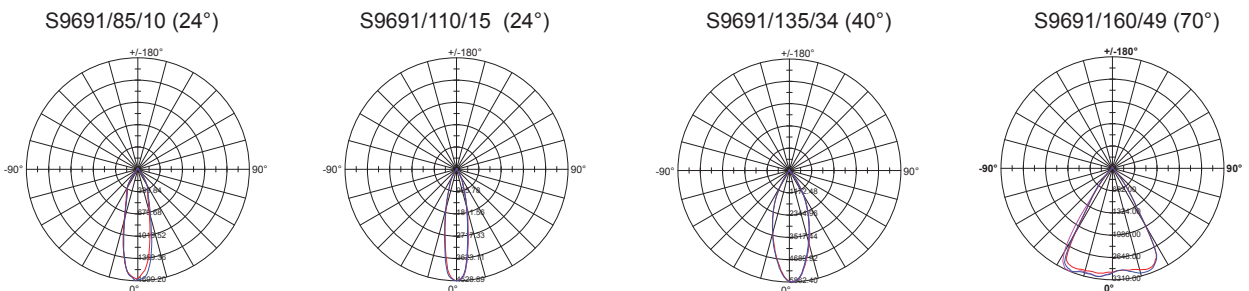

Dimmer/Switch
Compatible



www.sal.net.au