


LED PANEL

S9714 PANEL




DIMENSIONS


S9714/306




S9714/606



S9714/312



S9714/612

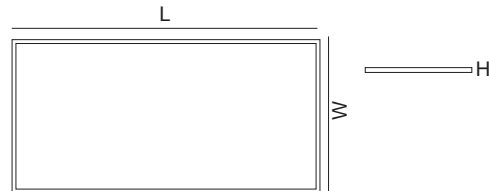

CONSTRUCTION

- Extruded aluminium frame
- Powder coated finish
- High efficiency opal polystyrene back diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver fitted
- 1.2 m flex & 2 pin plug
- Select colour temperature with DIP switch (TC models)

IP RATING

- IP20 suitable for interior use only

DIMMING OPTIONS

- Trailing edge (excluding S9714/612)
- 1-10V analogue (excluding S9714/612)
- DALI / DSI, digital

INSTALLATION TYPES



- Standard metric T-Bar ceiling recessed installation
Air Slot models to suit –/306, –/312 panel sizes
- Plaster ceiling recessed installation
(S9704 Plaster ceiling frame required)
- Clean Room models to suit –/606, –/312 panel sizes
- Surface mounted installation
(S306FM, S312FM, S606FM or S612FM surface mounted frame required)
- Suspended installation
(SSI1512 & S9714SP6 or SSI1512 & S9714SP6 Suspension Kits required)

| Model No. | Input | Power | Lumen | CCT | Beam Angle | CRI | Fitting Colour | Dimensions L x W x H |
|--------------|-------|-------|--------|-------|------------|-----|----------------|----------------------|
| S9714/306 CW | 240V | 18W | 2000lm | 4000K | 100° | >80 | White | 595 x 295 x 12 mm |
| S9714/606 CW | 240V | 30W | 3200lm | 4000K | 100° | >80 | White | 595 x 595 x 12 mm |
| S9714/606 DL | 240V | 30W | 3300lm | 6000K | 100° | >80 | White | 595 x 595 x 12 mm |
| S9714/312 CW | 240V | 30W | 3100lm | 4000K | 100° | >80 | White | 1195 x 295 x 12 mm |
| S9714/312 DL | 240V | 30W | 3200lm | 6000K | 100° | >80 | White | 1195 x 295 x 12 mm |
| S9714/612 CW | 240V | 48W | 5200lm | 4000K | 100° | >80 | White | 1195 x 595 x 12 mm |

| Model No. | Input | Power | Lumen | CCT | Beam Angle | CRI | Fitting Colour | Dimensions L x W x H |
|-------------|-------|-------|----------------------|-------------------|------------|-----|----------------|----------------------|
| S9714/306TC | 240V | 18W | 1900lm/2000lm/2100lm | 3000K/4000K/5700K | 100° | >80 | White | 595 x 295 x 12 mm |
| S9714/606TC | 240V | 30W | 3100lm/3200lm/3300lm | 3000K/4000K/5700K | 100° | >80 | White | 595 x 595 x 12 mm |
| S9714/312TC | 240V | 30W | 3000lm/3100lm/3200lm | 3000K/4000K/5700K | 100° | >80 | White | 1195 x 295 x 12 mm |
| S9714/612TC | 240V | 48W | 5000lm/5200lm/5300lm | 3000K/4000K/5700K | 100° | >80 | White | 1195 x 595 x 12 mm |

PHOTOMETRIC DATA

Unit: cd C0/C180 — C90/C270 —

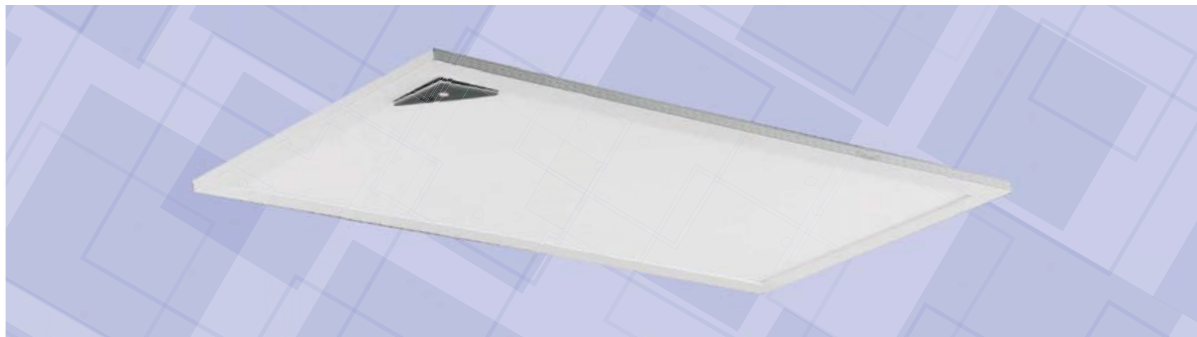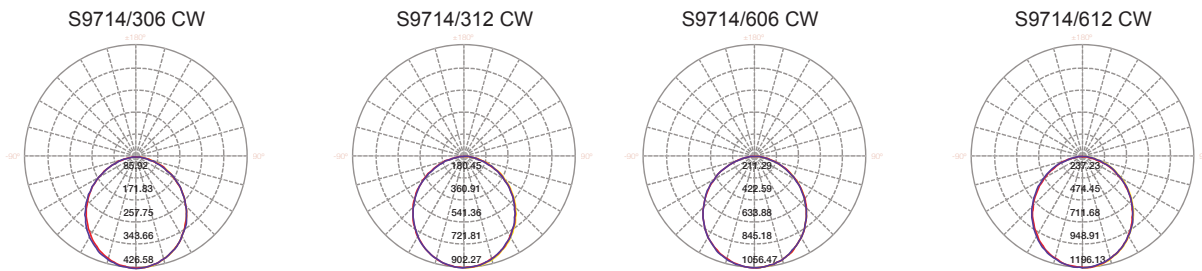

EMERGENCY

- Compliant to AS2293
- Emergency classification: D32
- LED charge status indicator
- Test switch
- Guaranteed 90 minutes emergency operation
- Intelligent automatic recharging function
- 16 hours charge time
- Deep discharge protection
- SELV compliant
- Battery type: 2500mAh @ 4.8V

| Model No. | Input | Power | Power (EM Mode) | Emergency Classification | Beam Angle | CRI | Battery |
|-------------|-------|-------|-----------------|--------------------------|------------|-----|----------------|
| S9714/306EM | 240V | 18W | 2W | D32 | 100° | >80 | 2500mAh @ 4.8V |
| S9714/606EM | 240V | 30W | 2W | D32 | 100° | >80 | 2500mAh @ 4.8V |
| S9714/312EM | 240V | 30W | 2W | D32 | 100° | >80 | 2500mAh @ 4.8V |
| S9714/612EM | 240V | 48W | 2W | D32 | 100° | >80 | 2500mAh @ 4.8V |