



# LED CONNECTABLE PROFILE

## S9776 TITAN

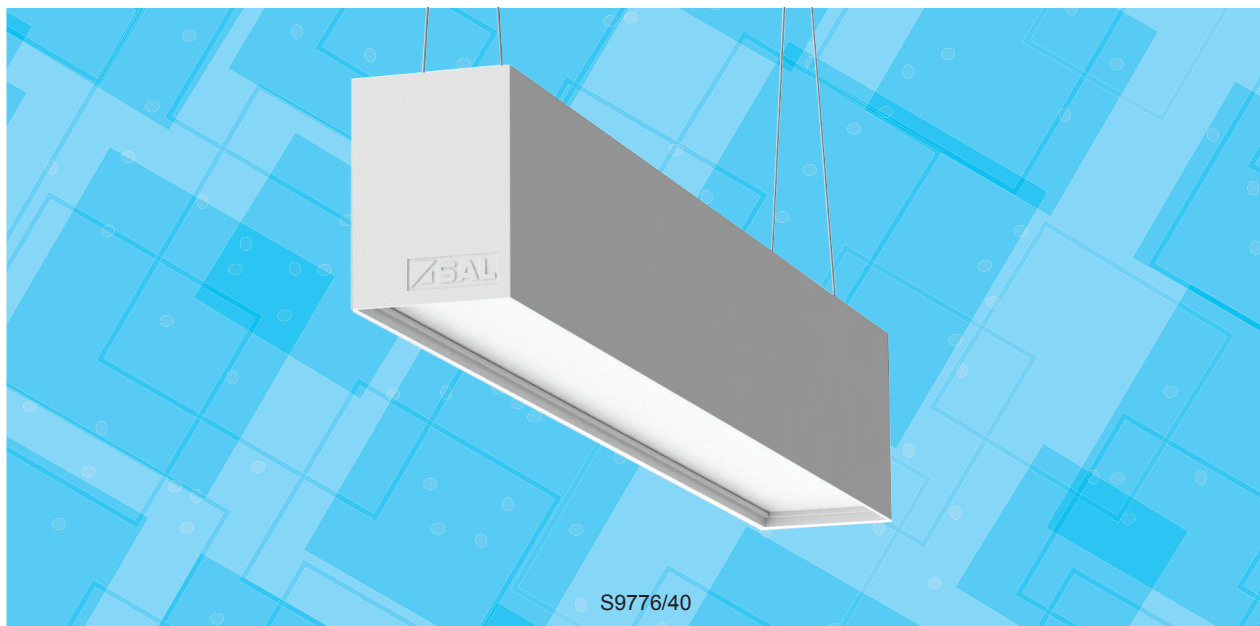

### DIMENSIONS

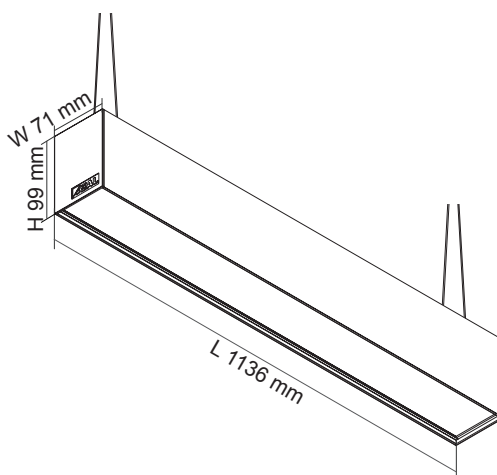

### CONSTRUCTION

- Extruded aluminium profile
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver fitted
- Adjustable suspension kit fitted (2 x SSY1512)
- Surface mounted (allow min. 70 mm clearance at both ends)
- Loop in loop out cable duct

### IP RATING

- IP20 suitable for interior use only

### COLOUR TEMPERATURE



- 4000K Cool White (standard)
- 3000K Warm White (option)
- 6000K Daylight (option)

### DIMMING OPTIONS

- Trailing edge
- DALI / DSI, digital

### ACCESSORY OPTION

- Straight link (S9776IP)

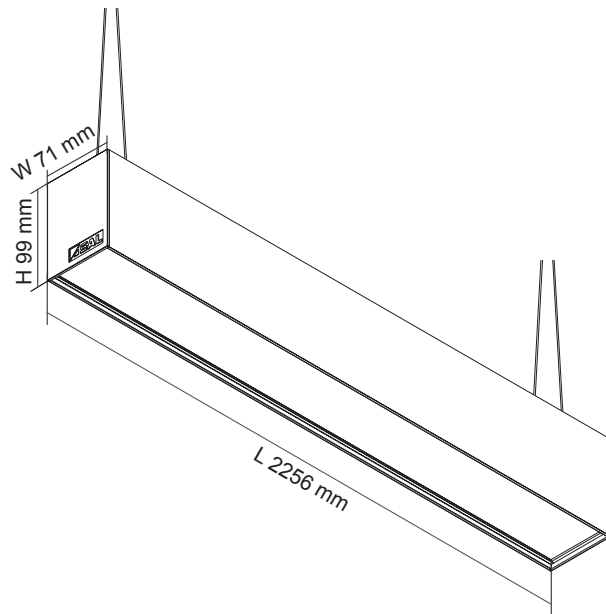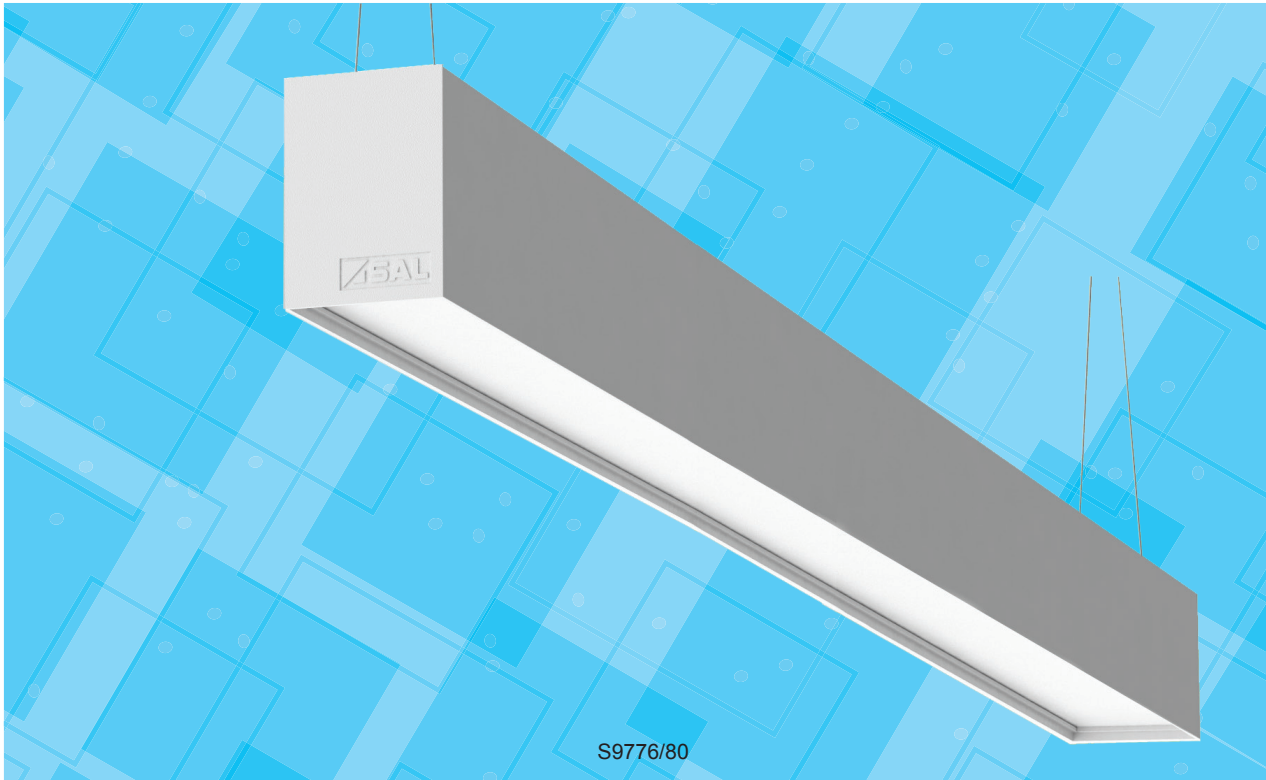

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Dimensions L x W x H
<b>S9776/40CW</b>	240V	40W	3000lm	4000K	90°	>80	White	1136 x 71 x 99 mm
<b>S9776/80CW</b>	240V	80W	6000lm	4000K	90°	>80	White	2256 x 71 x 99 mm