


LED FLOOD LIGHT

SE7071 STARPAD



DIMENSIONS

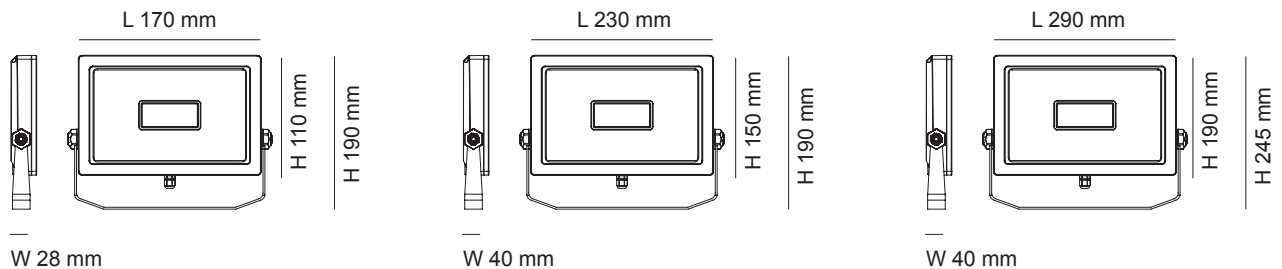

CONSTRUCTION

- Die-cast aluminium body
- Powder coated finish
- Clear tempered glass front cover
- High efficiency SMD LED chips
- Frost polycarbonate diffuser
- High performance aluminium reflector
- Built-in constant current non-dimmable LED driver
- IP67 nickel plated copper cable gland
- 600 mm 3 core rubber flex

IP RATING

- IP65 weatherproof

FITTING COLOUR

- Black
- White
- Silver

COLOUR TEMPERATURE

- 3000K Warm White
- 5000K Neutral Daylight


Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
SE7071/15WW/WH	240V	15W	1100lm	3000K	110°	>80	White
SE7071/15WW/SL	240V	15W	1100lm	3000K	110°	>80	Silver
SE7071/15WW/BK	240V	15W	1100lm	3000K	110°	>80	Black
SE7071/15DL/WH	240V	15W	1200lm	5000K	110°	>80	White
SE7071/15DL/SL	240V	15W	1200lm	5000K	110°	>80	Silver
SE7071/15DL/BK	240V	15W	1200lm	5000K	110°	>80	Black

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
SE7071/30WW/WH	240V	30W	2300lm	3000K	110°	>80	White
SE7071/30WW/SL	240V	30W	2300lm	3000K	110°	>80	Silver
SE7071/30WW/BK	240V	30W	2300lm	3000K	110°	>80	Black
SE7071/30DL/WH	240V	30W	2500lm	5000K	110°	>80	White
SE7071/30DL/SL	240V	30W	2500lm	5000K	110°	>80	Silver
SE7071/30DL/BK	240V	30W	2500lm	5000K	110°	>80	Black

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
SE7071/50WW/WH	240V	50W	3700lm	3000K	110°	>80	White
SE7071/50WW/SL	240V	50W	3700lm	3000K	110°	>80	Silver
SE7071/50WW/BK	240V	50W	3700lm	3000K	110°	>80	Black
SE7071/50DL/WH	240V	50W	3900lm	5000K	110°	>80	White
SE7071/50DL/SL	240V	50W	3900lm	5000K	110°	>80	Silver
SE7071/50DL/BK	240V	50W	3900lm	5000K	110°	>80	Black

PHOTOMETRIC DATA Unit: cd C0/C180 _____ C90/C270 _____

SE7071/30DL/BK



SE7071/50DL/BK

