

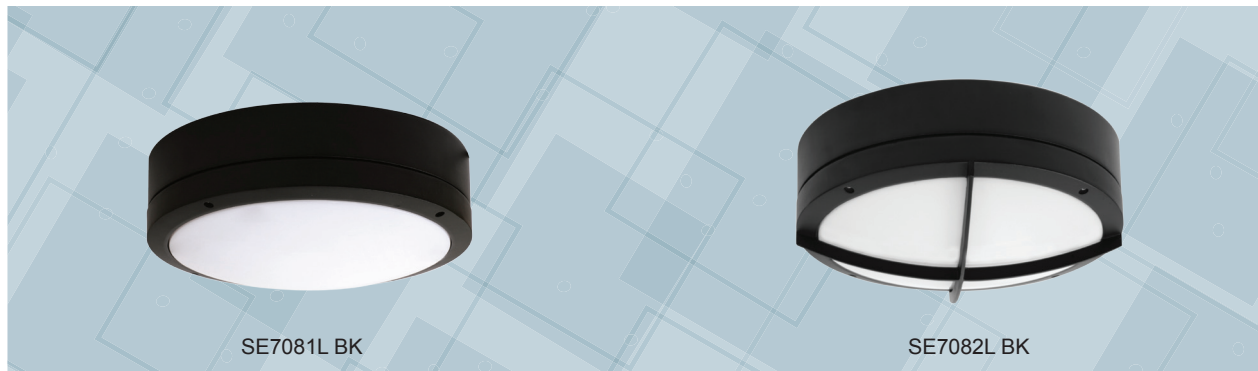


LED COMMERCIAL BUNKER LIGHT

SE7081L, SE7082L COOPER



DIMENSIONS



CONSTRUCTION

- Die-cast aluminium body
- Powder coated finish
- UV stabilised opal polycarbonate diffuser
- Stainless steel allen screws
- Silicon gasket
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver fitted

IP RATING

- IP65 weatherproof

SENSOR OPTIONS

- Integrated microwave sensor

DIMMING OPTIONS

- Trailing edge

EMERGENCY OPTIONS

- Compliant to AS2293
- Emergency classification:
D32 (SE7083L/EM)
D25 (SE7084L/EM)



Model No.	Input	Power	Lumen	CCT	CRI	Fitting Colour
SE7081L SL WW	240V	16W	1100lm	3000K	>80	Silver
SE7081L SL DL	240V	16W	1100lm	6000K	>80	Silver
SE7081L BK WW	240V	16W	1100lm	3000K	>80	Black
SE7081L BK DL	240V	16W	1100lm	6000K	>80	Black
SE7082L SL WW	240V	16W	1000lm	3000K	>80	Silver
SE7082L SL DL	240V	16W	1000lm	6000K	>80	Silver
SE7082L BK WW	240V	16W	1000lm	3000K	>80	Black
SE7082L BK DL	240V	16W	1000lm	6000K	>80	Black

PHOTOMETRIC DATA Unit: cd C0/C180 _____ C90/C270 _____

