

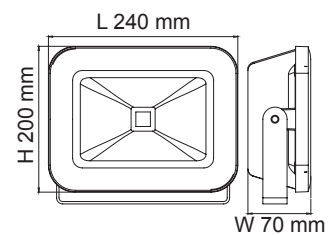


LED FLOOD LIGHT

SE7174 NEW STAR

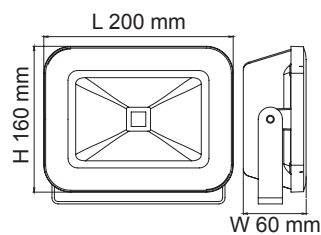

DIMENSIONS

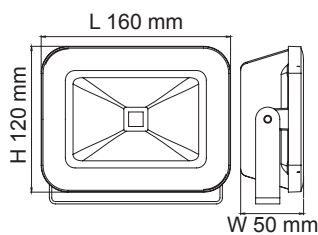

CONSTRUCTION

- Die-cast aluminium body
- Powder coated finish
- Clear tempered glass front cover
- High output COB LED chip
- High performance aluminium reflector




- Built-in constant current non-dimmable LED driver
- IP67 nickel plated copper cable gland
- 600 mm 3 core rubber flex

IP RATING

- IP65 weatherproof

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
SE7174/10WW/SL	240V	10W	700lm	3000K	120°	>80	Silver
SE7174/10WW/BK	240V	10W	700lm	3000K	120°	>80	Black
SE7174/10DL/SL	240V	10W	800lm	5700K	120°	>80	Silver
SE7174/10DL/BK	240V	10W	800lm	5700K	120°	>80	Black
SE7174/20WW/SL	240V	20W	1500lm	3000K	120°	>80	Silver
SE7174/20WW/BK	240V	20W	1500lm	3000K	120°	>80	Black
SE7174/20DL/SL	240V	20W	1700lm	5700K	120°	>80	Silver
SE7174/20DL/BK	240V	20W	1700lm	5700K	120°	>80	Black
SE7174/30WW/SL	240V	30W	2300lm	3000K	120°	>80	Silver
SE7174/30WW/BK	240V	30W	2300lm	3000K	120°	>80	Black
SE7174/30DL/SL	240V	30W	2500lm	5700K	120°	>80	Silver
SE7174/30DL/BK	240V	30W	2500lm	5700K	120°	>80	Black

PHOTOMETRIC DATA Unit: cd C0/C180 — C90/C270

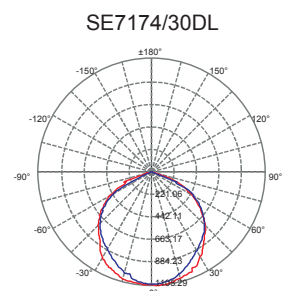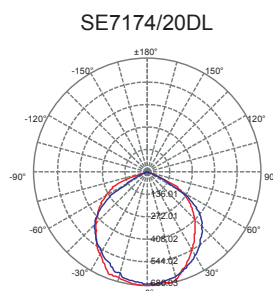
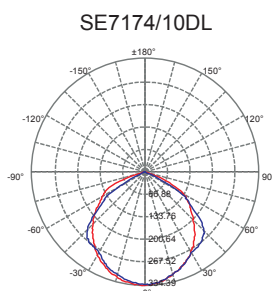




SE7174/50 BK

SE7174/100 BK

DIMENSIONS

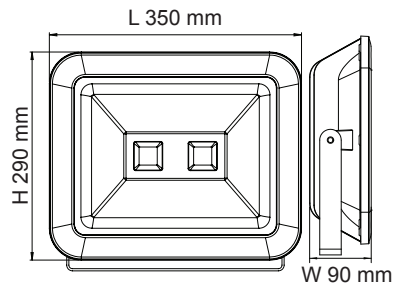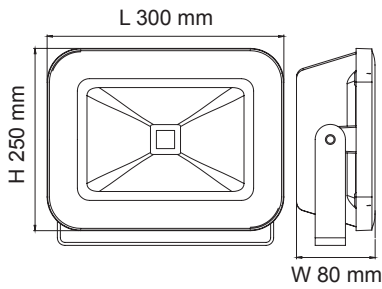

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
SE7174/50WW/SL	240V	50W	3900lm	3000K	120°	>80	Silver
SE7174/50WW/BK	240V	50W	3900lm	3000K	120°	>80	Black
SE7174/50DL/SL	240V	50W	4200lm	5700K	120°	>80	Silver
SE7174/50DL/BK	240V	50W	4200lm	5700K	120°	>80	Black
SE7174/100WW/SL	240V	100W	8000lm	3000K	120°	>80	Silver
SE7174/100WW/BK	240V	100W	8000lm	3000K	120°	>80	Black
SE7174/100DL/SL	240V	100W	8000lm	5700K	120°	>80	Silver
SE7174/100DL/BK	240V	100W	8000lm	5700K	120°	>80	Black

PHOTOMETRIC DATA Unit: cd C0/C180 — C90/C270

