

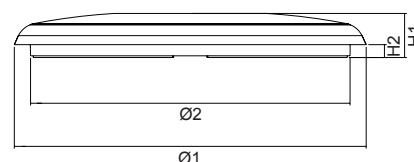


# DIMMABLE LED OYSTER LIGHT

## SL2105 DISC

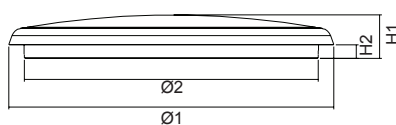

### DIMENSIONS



### CONSTRUCTION

- Polycarbonate housing
- Opal polycarbonate diffuser
- Double insulation
- High efficiency SMD LED chips
- Built-in constant current trailing edge dimmable LED driver

### IP RATING


- IP54 weatherproof

| Model No.   | Input | Power | Lumen  | CCT   | CRI | Fitting Colour | Dimensions Ø1 x H1, Ø2 x H2 |
|-------------|-------|-------|--------|-------|-----|----------------|-----------------------------|
| SL2105/20WW | 240V  | 12W   | 1050lm | 3000K | >80 | White          | 200 x 48 mm, 173 x 16 mm    |
| SL2105/20DL | 240V  | 12W   | 1100lm | 5000K | >80 | White          | 200 x 48 mm, 173 x 16 mm    |
| SL2105/30WW | 240V  | 25W   | 2000lm | 3000K | >80 | White          | 300 x 40 mm, 271 x 13 mm    |
| SL2105/30DL | 240V  | 25W   | 2200lm | 5000K | >80 | White          | 300 x 40 mm, 271 x 13 mm    |
| SL2105/40WW | 240V  | 30W   | 2800lm | 3000K | >80 | White          | 400 x 52 mm, 363 x 15 mm    |
| SL2105/40DL | 240V  | 30W   | 2900lm | 5000K | >80 | White          | 400 x 52 mm, 363 x 15 mm    |


### PHOTOMETRIC DATA

Unit: cd C0/C180 — C90/C270


SL2105/20DL



SL2105/30DL



SL2105/40DL



Specifications above are for reference only and may vary without prior notice