



# DIMMABLE LED OYSTER LIGHT

## SL2110 FLAT

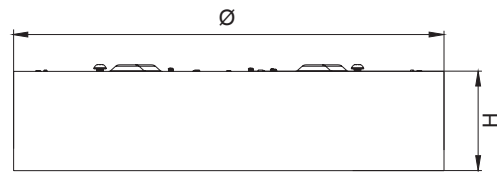

### DIMENSIONS

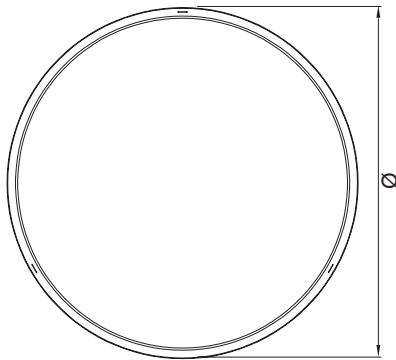

### CONSTRUCTION

- Seamless surface mounting base
- Polycarbonate diffuser
- Simple twist lock installation mechanism
- Constant current trailing edge dimmable LED driver fitted

### IP RATING

- IP20 suitable for interior use only

### COLOUR TEMPERATURE

- 4000K Cool White (standard)
- 3000K Warm White (option)
- 6000K Daylight (option)

### DIMMING OPTIONS

- DALI / DSI, digital (SL2110/30 & SL2110/40 only)

### INSTALLATION OPTION


- SL2110/30, SL2110/40, SL2110/50: suspension kits provided (standard length 1.5 m and adjustable)



\*Image shown with suspension kit

Model No.	Input	Power	Lumen	CCT	CRI	Fitting Colour	Dimensions Ø x H
SL2110/10CW	240V	5W	180lm	4000K	>80	White	110 x 50 mm
SL2110/20CW	240V	12W	780lm	4000K	>80	White	160 x 50 mm
SL2110/30CW	240V	18W	1200lm	4000K	>80	White	260 x 60 mm
SL2110/40CW	240V	30W	2300lm	4000K	>80	White	350 x 60 mm
SL2110/50CW	240V	40W	3200lm	4000K	>80	White	480 x 60 mm

**PHOTOMETRIC DATA** UNIT: cd C0/C180 \_\_\_\_\_

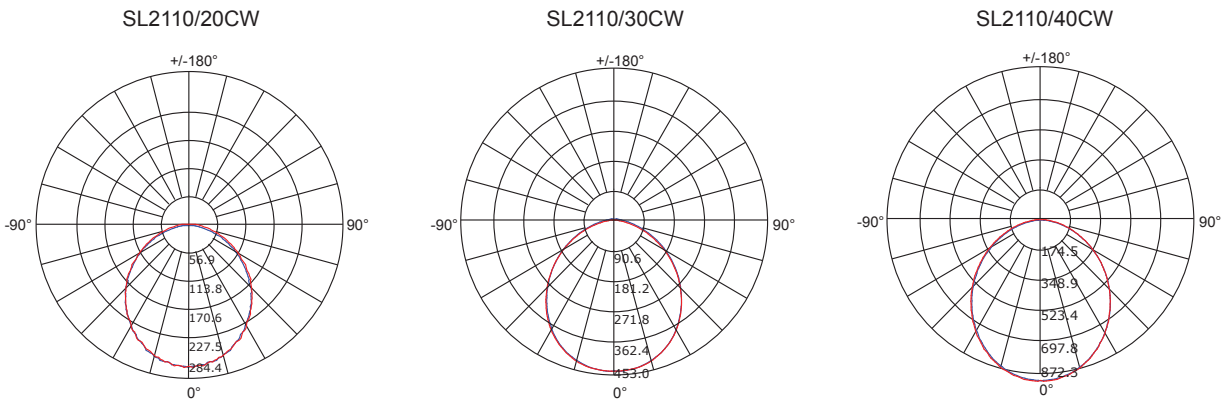

Specifications above are for reference only and may vary without prior notice

