



LED CEILING LIGHT

SL3147 FLORIO

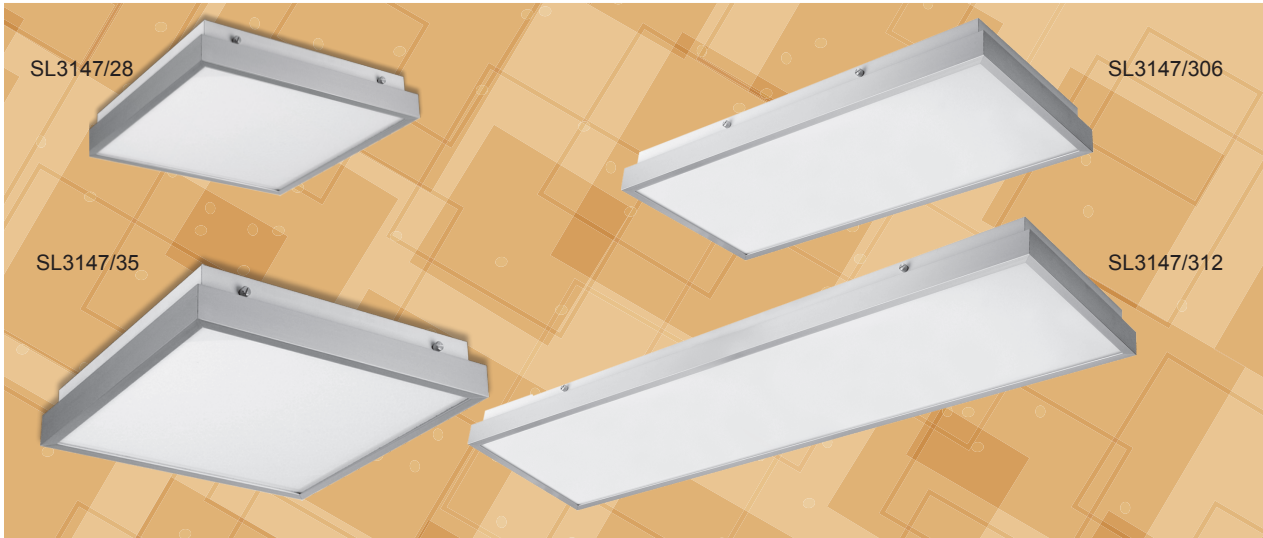

DIMENSIONS

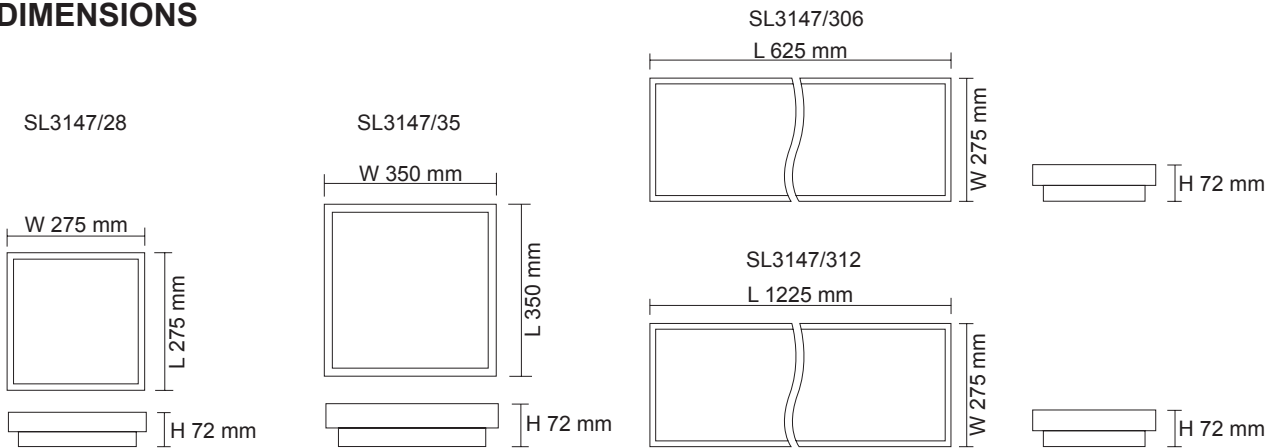

CONSTRUCTION

- Extruded aluminium frame
- Powder coated steel base
- Opal polystyrene diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver fitted

IP RATING

- IP20 suitable for interior use only

SENSOR OPTION

- Integrated microwave motion sensor
- Integrated microwave motion sensor with standBY function

DIMMING OPTIONS

- Trailing edge (excluding SL3147/312)
- 1-10V analogue
- DALI / DSI, digital

INSTALLATION OPTION (SL3147/306, SL3147/312)

- Surface mounted
- Suspension unit required (SSI1512 or SSI1512)

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Dimensions L x W X H
SL3147/28CW	240V	14W	900lm	4000K	110°	>80	Anodized Silver	275 x 275 X 72 mm
SL3147/35CW	240V	22W	1500lm	4000K	110°	>80	Anodized Silver	350 x 350 X 72 mm
SL3147/306 CW	240V	21W	1400lm	4000K	110°	>80	Anodized Silver	625 x 275 X 72 mm
SL3147/312 CW	240V	41W	2800lm	4000K	110°	>80	Anodized Silver	1225 x 275 X 72 mm