

LOW PROFILE LED BATTEN

SL9707 BLADE

CONSTRUCTION

- Extruded aluminium body with poly end cap
- Powder coated finish
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Built-in LED driver

IP RATING


- IP20 suitable for indoor use only

INSTALLATION TYPE

- Surface mounted
- Suspended (Suspension unit required SSI1512, SSY1512)
- End to end installation

DIMENSIONS

SL9707/60

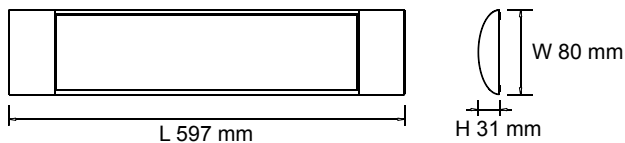


SL9707/60



SL9707/120

SL9707/120

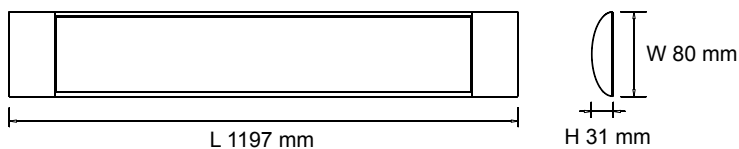

Model No.	Input	Power	Lumen	CCT	CRI	Beam Angle	Fitting Colour
SL9707/60WW	240V	20W	1800lm	3000K	>80	110°	White
SL9707/60CW	240V	20W	1850lm	4000K	>80	110°	White
SL9707/60DL	240V	20W	1900lm	5000K	>80	110°	White
SL9707/120WW	240V	35W	3300lm	3000K	>80	110°	White
SL9707/120CW	240V	35W	3400lm	4000K	>80	110°	White
SL9707/120DL	240V	35W	3500lm	5000K	>80	110°	White

PHOTOMETRIC DATA

Unit: cd C0/C180 ——— C90/C270 ———

SL9707/60DL

SL9707/120DL

