

## LOW PROFILE LED BATTEN

### SL9709 BLADE

#### CONSTRUCTION

- Extruded aluminium body with poly end cap
- Powder coated finish
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Built-in LED driver

#### IP RATING



- IP20 suitable for indoor use only

#### INSTALLATION TYPE

- Surface mounted
- Suspended (Suspension Kit Required SSI1512, SSY1512)
- End to end installation



#### DIMENSIONS

SL9709/60

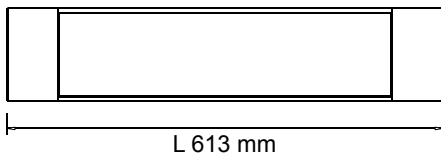

SL9709/60

SL9709/120

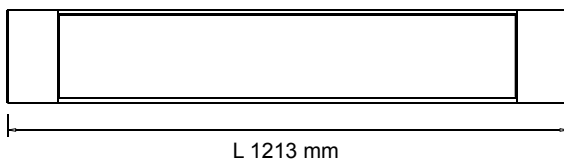

SL9709/120

| Model No.    | Input | Power | Lumen  | CCT   | CRI | Beam Angle | Fitting Colour |
|--------------|-------|-------|--------|-------|-----|------------|----------------|
| SL9709/60WW  | 240V  | 25W   | 2200lm | 3000K | >80 | 110°       | White          |
| SL9709/60CW  | 240V  | 25W   | 2600lm | 4000K | >80 | 110°       | White          |
| SL9709/60DL  | 240V  | 25W   | 2400lm | 5000K | >80 | 110°       | White          |
| SL9709/120WW | 240V  | 48W   | 4400lm | 3000K | >80 | 110°       | White          |
| SL9709/120CW | 240V  | 48W   | 5000lm | 4000K | >80 | 110°       | White          |
| SL9709/120DL | 240V  | 48W   | 4800lm | 5000K | >80 | 110°       | White          |

#### PHOTOMETRIC DATA

Unit: cd      C0/C180 —      C90/C270 —

SL9709/60CW

SL9709/120CW

