



LED SURFACE LIGHT

SL9712, SL9712/40 VENICE


IP64



DIMENSIONS

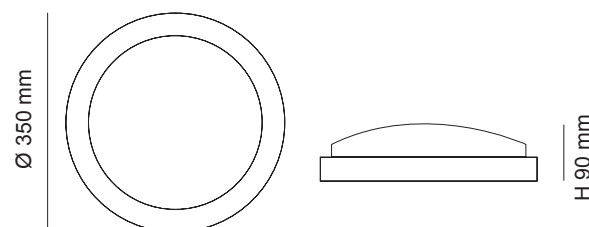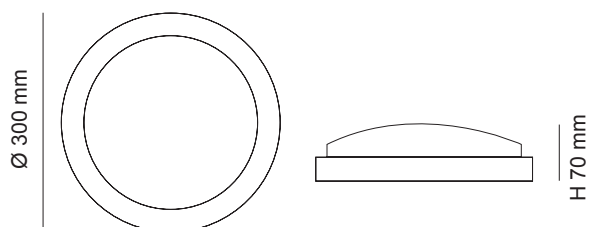

CONSTRUCTION

- Polycarbonate base and ring
- Double insulation 
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver fitted

IP RATING

- IP64 weatherproof

DIMMING OPTIONS

- Trailing edge

Model No.	Input	Power	Lumen	CCT	CRI	Fitting Colour
SL9712 WH	240V	13W	900lm	4000K	>85	White
SL9712 CH	240V	13W	900lm	4000K	>85	Chrome
SL9712 SL	240V	13W	900lm	4000K	>85	Silver
SL9712 BL	240V	13W	900lm	4000K	>85	Black

Model No.	Input	Power	Lumen	CCT	CRI	Fitting Colour
SL9712/40 SL	240V	24W	1800lm	4000K	>80	Silver
SL9712/40 WH	240V	24W	1800lm	4000K	>80	White
SL9712/40 BK	240V	24W	1800lm	4000K	>80	Black

AVAILABLE RING COLOURS

