


COMMERCIAL LED OYSTER LIGHT

SO3800 TC OPAL II



SO3800/40TC

DIMENSIONS

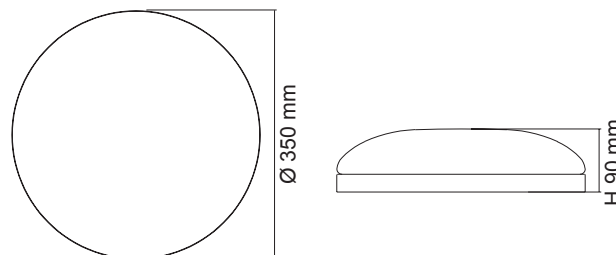

CONSTRUCTION

- Colour temperature selectable by DIP switch
- Built-in constant current trailing edge dimmable LED driver (excluding SO3800/40TC/S, SO3800/40TC/EMS)
- Powder coated steel body
- Opal polycarbonate diffuser
- High efficiency SMD LED chips

IP RATING

- IP20 suitable for interior use only

FITTING COLOUR

- White

SENSOR MODELS

(SO3800/40TC/S, SO3800/40TC/EMS):

- Adjustable sensor detection range
- Adjustable daylight threshold
- Adjustable duration
- Non-dimmable



EMERGENCY MODELS

(SO3800/40TC/EM, SO3800/40TC/EMS):

- Compliant to AS2293
- LiFePO₄ battery





Model No.	Input	Power	Lumen	CCT	CRI	Dimmable	Emergency	Sensor
SO3800/40TC	240V	30W	2400lm/2600lm/2500lm	3000K/4000K/5700K	>80	Yes*		
SO3800/40TC/EM	240V	30W	2400lm/2600lm/2500lm	3000K/4000K/5700K	>80	Yes*	✓	
SO3800/40TC/S	240V	30W	2400lm/2600lm/2500lm	3000K/4000K/5700K	>80	No		✓
SO3800/40TC/EMS	240V	30W	2400lm/2600lm/2500lm	3000K/4000K/5700K	>80	No	✓	✓

* Trailing edge dimming

PHOTOMETRIC DATA (AT CCT 4000K) Unit: cd C0/C180 _____ C90/C270 _____

SO3800/40TC at 4000K

