

# LED PENDANT LIGHT

## SPL020 PIP

### CONSTRUCTION

- Ultra Slimline suspended tube profile
- Ultra slim recessed ceiling plate to suit standard 72 mm cut out
- Die-cast aluminium body
- High efficiency COB LED chip
- Recessed downlight mounting installation
- Standard adjustable wire length up to 1.2 m
- Built-in constant current non-dimmable LED driver

### IP RATING

- IP20 suitable for interior use only

### FITTING COLOUR

- White (standard)
- Black (option)



### BEAM ANGLE

- 25° (standard)
- 10°, 40° optical reflector (option)

### COLOUR TEMPERATURE

- 3000K Warm White (standard)
- 4000K Cool White (option)
- 6000K Daylight (option)

### DIMENSIONS

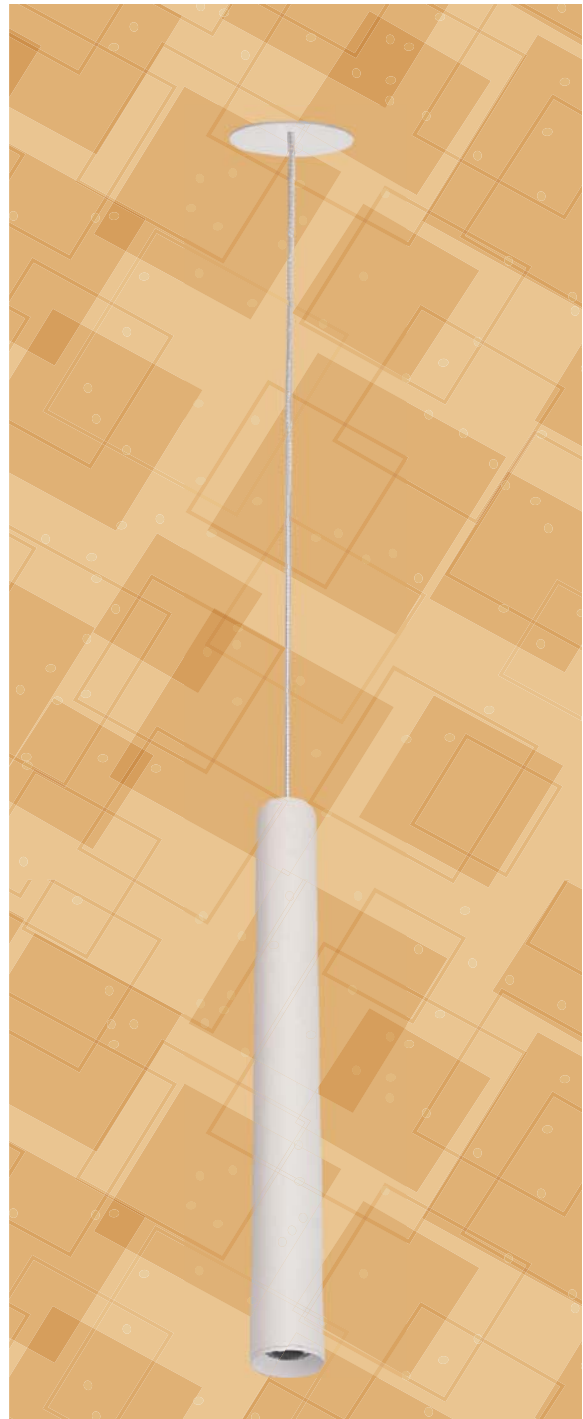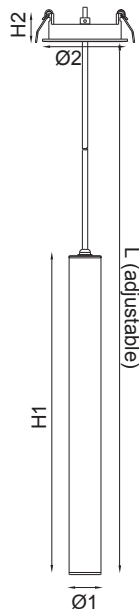

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Cut Out Ø	Dimension Ø1 x H1, Ø2 x H2
SPL020WW30	240V	5W	160lm	3000K	25°	>80	72 mm	30 x 300 mm, 80 x 26 mm
SPL020WW45	240V	5W	160lm	3000K	25°	>80	72 mm	30 x 450 mm, 80 x 26 mm