

DIMMABLE LED PENDANT LIGHT

SPL9017 UNITREK



CONSTRUCTION

- Architectural cylindrical profile
- Die-cast aluminium body
- High efficiency COB LED chip
- Changeable multi-reflector system
- Polycarbonate optical lens
- Built-in constant current trailing edge dimmable LED driver
- Standard adjustable wire length up to 1.2 m

IP RATING

- IP20 suitable for interior use only



FITTING COLOUR

- White (standard)
- Black (option)

BEAM ANGLE

- 60° (standard)
- 25°, 40° optical reflector (option)

DIMENSIONS

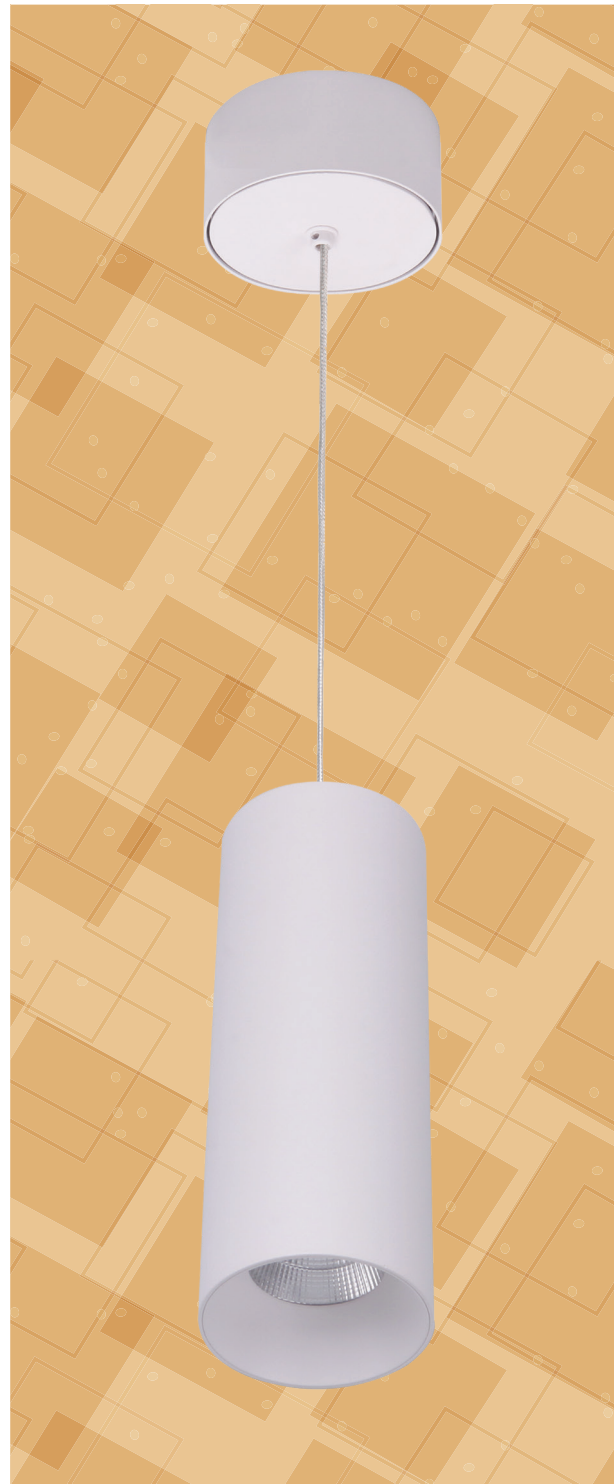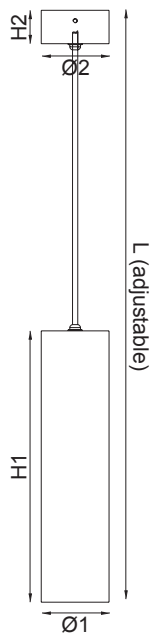

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimension Ø1 x H1, Ø2 x H2
SPL9017WW/WH	240V	9W	700lm	3000K	60°	>80	65 x 260, 65 x 32 mm
SPL9017CW/WH	240V	9W	800lm	4000K	60°	>80	65 x 260, 65 x 32 mm
SPL9017DL/WH	240V	9W	800lm	6000K	60°	>80	65 x 260, 65 x 32 mm