



STARPAD II SE7171TC - 15/100W

15/100 watt IP65 LED floodlight with integral selectable colour temperature

Application

A versatile floodlight solution for residential and commercial exterior spaces

Design Specifications

- Robust die-cast aluminium body, IK07 rated
- Durable black or silver powder coated finish
- Textured tempered glass front cover
- High efficiency SMD LED chips, non-dimmable LED driver, CRI >80, CCT selectable 3000K/4000K/5700K
- High performance aluminium reflector, beam distribution 100°
- 600 mm 3 core rubber flex (15-30 watt models), 800mm for (50-100 watt models)



-
-
-
-
-
-
-
-
-

Technical Specification


Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SE7171/15TC/WH	LED FLOODLIGHT 15W IP65 TC WH	240	15	1200/1425/1275	3000/4000/5700	80
SE7171/15TC/BK	LED FLOODLIGHT 15W IP65 TC BK	240	15	1200/1425/1275	3000/4000/5700	80
SE7171/30TC/WH	LED FLOODLIGHT 30W IP65 TC WH	240	30	2400/2850/2550	3000/4000/5700	80
SE7171/30TC/BK	LED FLOODLIGHT 30W IP65 TC BK	240	30	2400/2850/2550	3000/4000/5700	80
SE7171/50TC/WH	LED FLOODLIGHT 50W IP65 TC WH	240	50	4000/4750/4250	3000/4000/5700	80
SE7171/50TC/BK	LED FLOODLIGHT 50W IP65 TC BK	240	50	4000/4750/4250	3000/4000/5700	80
SE7171/100TC/WH	LED FLOODLIGHT 100W IP65 TC WH	240	100	8000/9500/8500	3000/4000/5700	80
SE7171/100TC/BK	LED FLOODLIGHT 100W IP65 TC BK	240	100	8000/9500/8500	3000/4000/5700	80

Technical Specification


Model No.	Beam Angle (°)	Body Colour	Dim (mm)	Mass (kg)
SE7171/15TC/WH	100	White	177(L) x 37(W) x 164(H)	0.63
SE7171/15TC/BK	100	Black	177(L) x 37(W) x 164(H)	0.63
SE7171/30TC/WH	100	White	217(L) x 40(W) x 200(H)	0.87
SE7171/30TC/BK	100	Black	217(L) x 40(W) x 200(H)	0.87
SE7171/50TC/WH	100	White	270(L) x 40(W) x 249(H)	1.35
SE7171/50TC/BK	100	Black	270(L) x 40(W) x 249(H)	1.35
SE7171/100TC/WH	100	White	330(L) x 43(W) x 325(H)	2.05
SE7171/100TC/BK	100	Black	330(L) x 43(W) x 325(H)	2.05

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

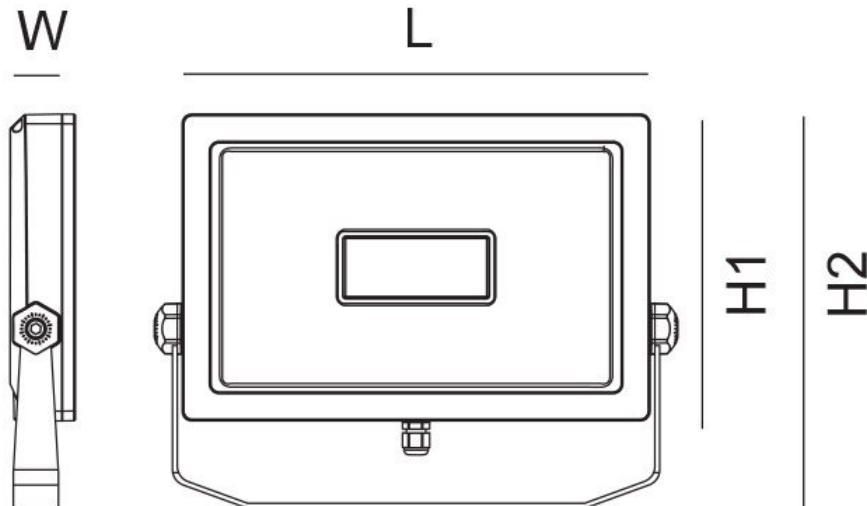


SE7171-15

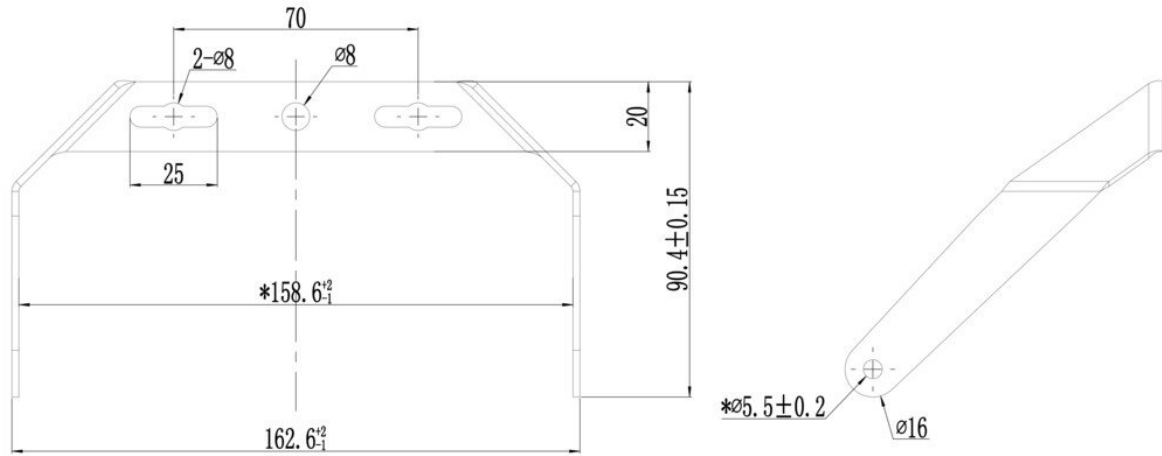


SE7171-30

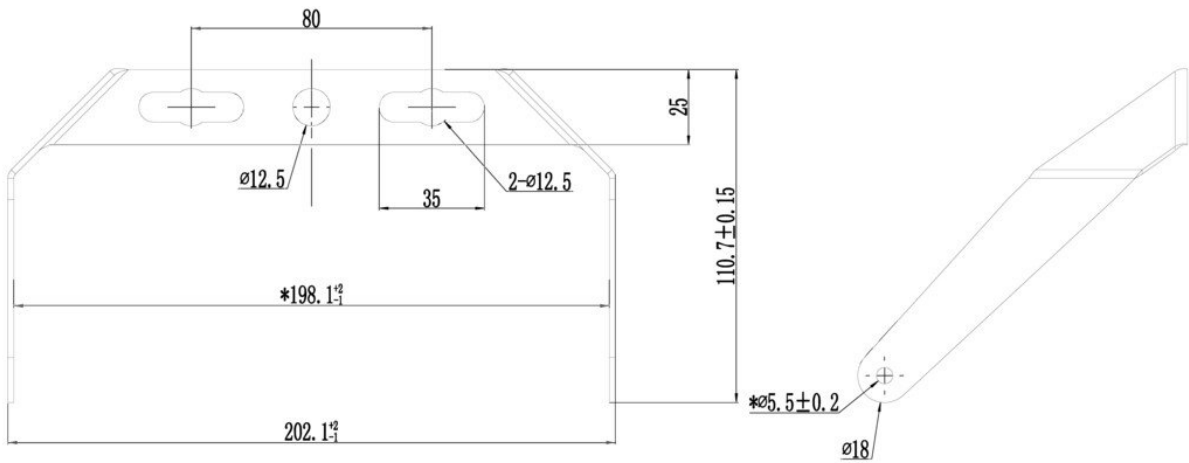

SE7171-50

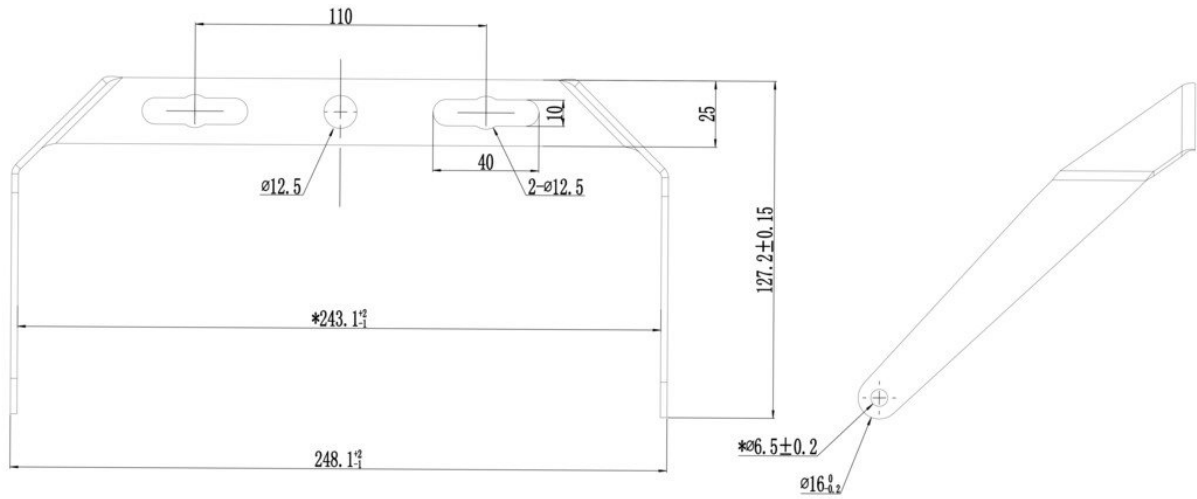

SE7171-100


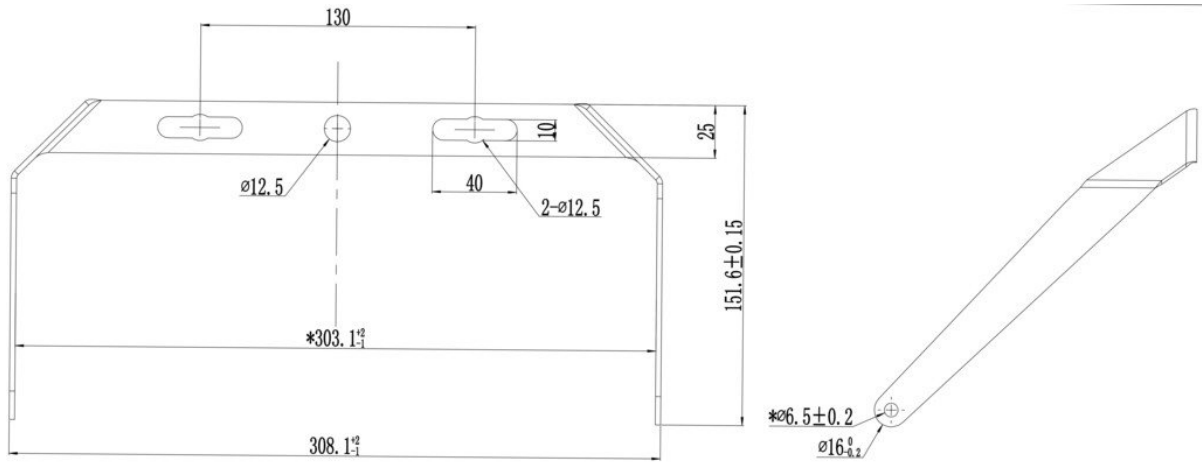


Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

SE7171/15TC/WH at 3000K

SE7171/100TC/WH at 3000K

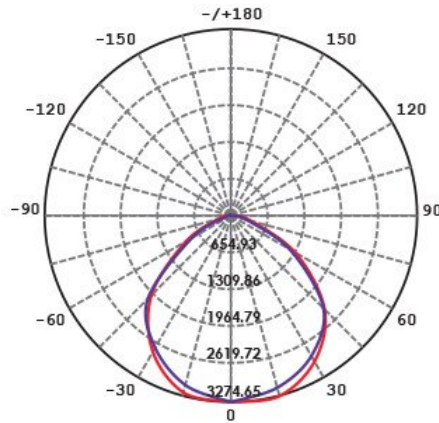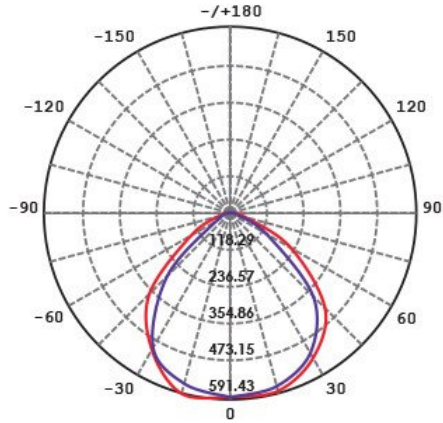

Product Images



