




THREE CIRCUIT LED TRACK LIGHT

STR4882 UNIVERSAL II

STR4883 UNIVERSAL III



DIMENSIONS

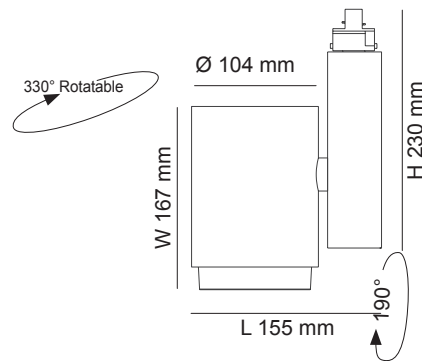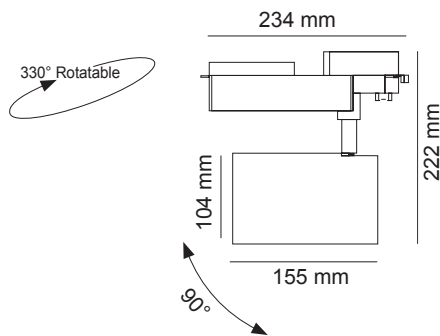

CONSTRUCTION

- Extruded aluminium body
- Powder coated finish
- Clear tempered glass cover
- High output COB LED chip
- High performance multi-reflector system
- Built-in constant current non-dimmable LED driver

IP RATING

- IP20 suitable for interior use only

BEAM ANGLE

- 36° (standard)
- 24° (option)



Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
STR4882/36 WH WW	240V	36W	3280lm	3000K	36°	>84	White
STR4882/36 BK WW	240V	36W	3280lm	3000K	36°	>84	Black
STR4883WW/WH	240V	36W	3280lm	3000K	36°	>80	White
STR4883WW/BK	240V	36W	3280lm	3000K	36°	>80	Black

PHOTOMETRIC DATA

Unit: cd, C0/C180 —— C90/C270 ——

STR4882/36 WW B.A. 36° 3000K

STR4883WW B.A. 36° 3000K

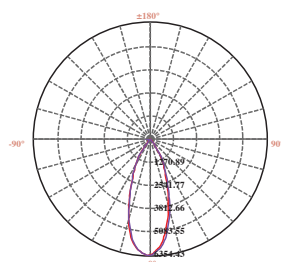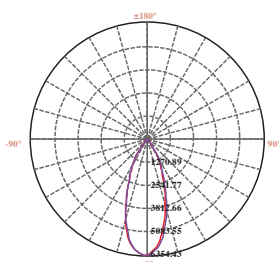

Specifications above are for reference only and may vary without prior notice

