



## TRADESTAR SE7169TC - 70/250W


A versatile LED floodlight range with five models ranging from 70 - 250 watt, now with selectable colour temperature.

### Application

Perfect for any exterior space from residential small wattage designs through to high performance commercial applications

### Design Specifications

- Integral LED control gear, non-dimmable 70, 100, 150, 200, 250 watt models
- Robust die-cast aluminium body profile with multi-function angled trunnion bracket, colour black
- Pre-wired with 1500mm UV rated flex for easy installation
- IK08, IP65 rated
- CRI >80, CCT 3000/4000/5000K and an impressive 120lm/W optical performance at 4000K
- 100 degree wide beam distribution

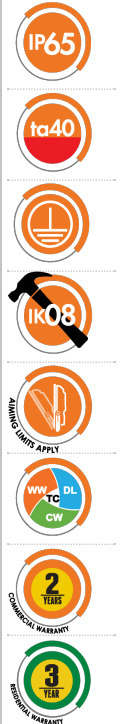


### Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
SE7169/70TC/BK	240	70	7350/8400/7700	3000/4000/5000	80	100
SE7169/100TC/BK	240	100	10500/12000/11000	3000/4000/5000	80	100
SE7169/150TC/BK	240	150	15750/18000/16500	3000/4000/5000	80	100
SE7169/200TC/BK	240	200	21000/24000/22000	3000/4000/5000	80	100
SE7169/250TC/BK	240	250	26250/30000/27500	3000/4000/5000	80	100

Model No.	Body Colour	Dim (mm)	Mass (kg)
SE7169/70TC/BK	Black	210(L) x 54(W) x 220(H)	1.9
SE7169/100TC/BK	Black	240(L) x 70(W) x 250(H)	2.9
SE7169/150TC/BK	Black	270(L) x 76(W) x 300(H)	3.8
SE7169/200TC/BK	Black	310(L) x 81(W) x 340(H)	4.9
SE7169/250TC/BK	Black	360(L) x 92(W) x 400(H)	7.1

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

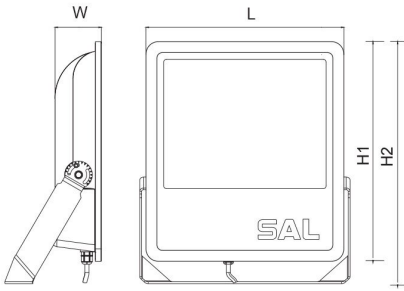


## Photometric Data

### Photometric Data

Unit: cd C0/C180 — C90/C270 —

SE7169/70TC/BK at 5000K

SE7169/250TC/BK at 5000K

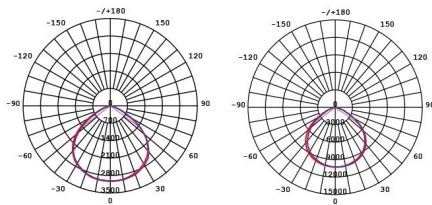

## POWERSTAR SE7100/600 - 600W



Before selecting a floodlight look out for the marks of Compliance and Safety. Starting with the RCM mark, this signals that the product has been tested to all relevant Australian Safety standards, to ensure the product delivers its designed safety performance.

In addition look out for limits in aiming orientation to ensure the floodlight operates within its design limits and to ensure the product is suitable for such an application.

*Need more information on AS/NZS 60598 safety and compliance?  
Check out the SAL web FAQ's or speak to your local SAL team member.*

For related  
products  
please  
scan me

