



UNITREK STR9017 - 15W

Dimmable 15 watt single circuit track spot, with integral driver - Unitrek single circuit

Application

Ideal for decorative interior or residential designs

Design Specifications

- Architectural cylindrical profile
- Aluminium body, colour matt white or black
- High efficiency COB LED chip, CRI > 80, CCT 3000K or 5000K
- Changeable multifaceted reflector system, polycarbonate lens, beam distribution 40 degree, 25 and 60 degree options
- 15 watt integral trailing edge dimmable driver

Performance

Dimmable - **YES**

Dimmer Type - **Trailing edge**



- SINGLE CIRCUIT
- IP20
- ra25
- DIMMABLE
- 2 YEAR COMMERCIAL WARRANTY
- 3 YEAR RESIDENTIAL WARRANTY
- WARM WHITE 3000K
- DAYLIGHT 5000K

Technical Specification


Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Body Colour
STR9017/15W/WW/WH	LED TRACK SPOT 15W SINGLE CIR 3K WH	240	15	1200	3000	White
STR9017/15W/WW/BK	LED TRACK SPOT 15W SINGLE CIR 3K BK	240	15	1200	3000	Black
STR9017/15W/NDL/WH	LED TRACK SPOT 15W SINGLE CIR 5K WH	240	15	1300	5000	White
STR9017/15W/NDL/BK	LED TRACK SPOT 15W SINGLE CIR 5K BK	240	15	1300	5000	Black

Technical Specification

Model No.	CRI	Beam Angle (°)	Dim (mm)
STR9017/15W/WW/WH	80	40	65(W) x 175(H)
STR9017/15W/WW/BK	80	40	65(W) x 175(H)
STR9017/15W/NDL/WH	80	40	65(W) x 175(H)
STR9017/15W/NDL/BK	80	40	65(W) x 175(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Dimensions

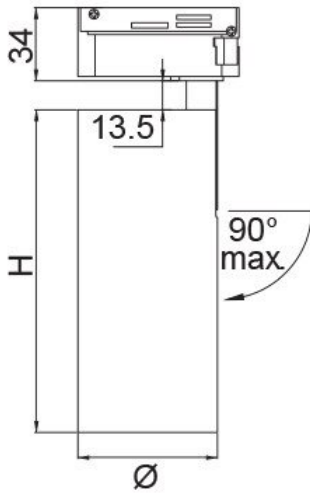

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

STR9017/15W/NDL at 5000K

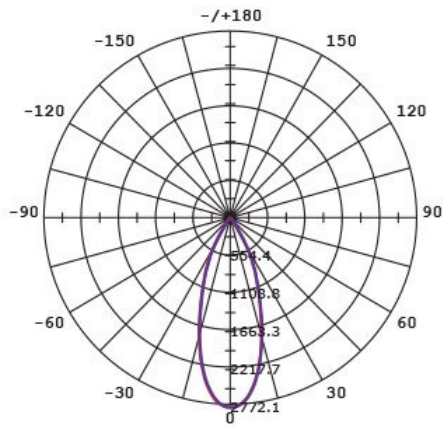

Product Images

