

LED Frame Lights

NEW

TRUE IC



230V-240V



- Recessed Gimble Frame Lights • Integral 6.5W LED module similar light output to a 50 watt halogen downlight
- Full metal case provides forward heat-sinking and closed IC rating • Integral driver



LDL-GIM1-SI



LDL-GIM3-SI



LDL-GIM2-SI



LDL-GIM4-SI

INTEGRAL



- **83 lm/W** • 540 total lm
- 6.5Watts • 3,000K • CRI>80 • 30° Beam

LDL-GIM1

- Flange 110mm Sq

INTEGRAL



- **83 lm/W** • 1080 total lm
- 2x 6.5Watts • 3,000K • CRI>80 • 30° Beam

LDL-GIM2

- Flange 203mmL x 110mmW

INTEGRAL



- **83 lm/W** • 1620 total lm
- 3x 6.5Watts • 3,000K • CRI>80 • 30° Beam

LDL-GIM3

- Flange 300mmL x 110mmW

INTEGRAL



- **83 lm/W** • 2160 total lm
- 4x 6.5Watts • 3,000K • CRI>80 • 30° Beam

LDL-GIM4

- Flange 210mm Sq




LDL-GIM1-WH




LDL-GIM3-WH



LDL-GIM2-WH

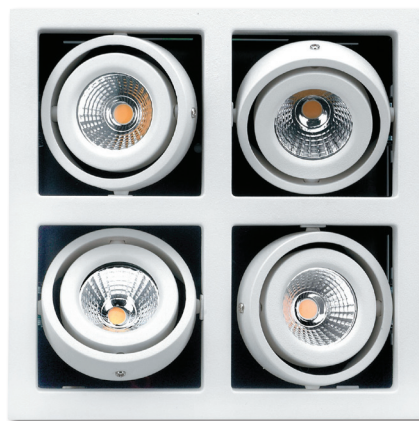

LDL-GIM4-WH



**30 degrees
half light beam angle**

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
LDL-GIM1	IC	Closed	cover over -non flammable	Yes	95mm x 95mm	150mm	20mm
LDL-GIM2	IC	Closed	cover over -non flammable	Yes	95mm x 190mm	150mm	20mm
LDL-GIM3	IC	Closed	cover over -non flammable	Yes	95mm x 285mm	150mm	20mm
LDL-GIM4	IC	Closed	cover over -non flammable	Yes	195mm x 195mm	150mm	20mm