

Wet Area Downlights

LED IP54



LDL-IP54-SI

LDL-IP54-WH

INTEGRAL




- 83 lm/W • 540 total lm
- 6.5Watts • 3,000K • CRI>81 • 50° Beam



LDL-IP54

- 6.5Watt integral LED, Similar light output to a 50 watt halogen
- 81mmØ Overall
- Supplied with LED driver, simply wire direct to mains
- Ideal for use in wet areas

MR16 IP65

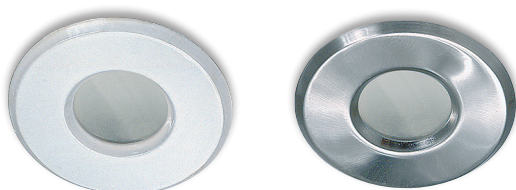

SV-IP65-WH

SV-IP65-SC



SV-IP65

- 85mmØ overall
- Ideal for use in wet areas
- Electronic transformer with lamp holder assembly with thermal cut off included

MR16

Hi-HALOGEN

MRE16-35-D38
Included



- 15 lm/W • 525 total lm • Dimmable
- 35Watts • 3,000K • CRI>100 • 38° Beam

LED

MR16-HPLED-WH



- 80 lm/W • 480 total lm
- 6Watts • 3,000K • CRI>80 • 38° Beam

EAVE LIGHT IP55

SV-IP55-SS



SV-IP55-SS

- 316 Stainless Steel Trim
- 105mmØ overall
- Ideal for under eave or in wet areas
- Purchase SVE-T60 transformer separately
- Flange sits proud of eave by 25mm