

LED
MR16-HPLED-WH
Included



- 80 lm/W • 480 total lm
- 6Watts • 3,000K • CRI>80 • 38° Beam

Reflector Optimised Downlight

LED 6 WATT

LED
Now 6W
480 lm



LDLB90-WH



LDLB90-SC





LDLB90-GD



LDLB90

- 6watt LED bulb comparable to 35watt halogen downlight
- Reflector bulb designed to give uniform light spread
- Integral driver for easy installation
- Aluminium die cast face
- Both lamp and downlight have heat sink technology for effective thermal management
- Japanese manufactured LED
- 5 year transformer warranty
- Acoustic rating: for acoustic STC55 Ceilings space 1.6m minimum. For acoustic (RW) STC57 and 58, space 2.5m minimum.

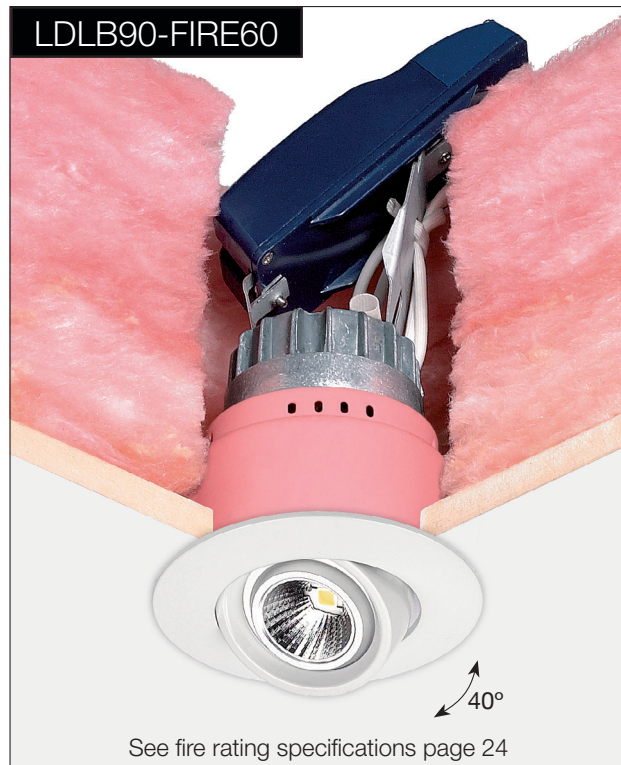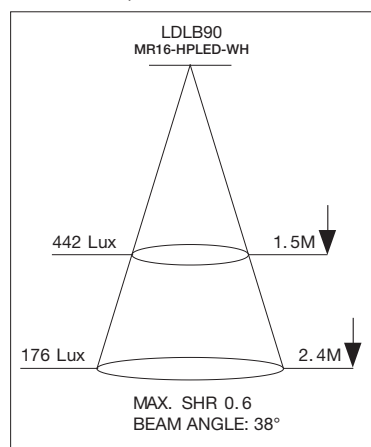

LDLB90-FIRE60

See fire rating specifications page 24

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION			CAVITY DEPTH	SIDE CLEARANCE
LDLB90	CA135	Closed	Side Abutted	Yes	90mm	210mm	50mm