




# Integral Design Tiltable Downlight

**HALOGEN**  
**MRE16-35-D38**  
*Included*

- 15lm/W • 525 total lm • Dimmable
- 35Watts • 3,000K • CRI>100 • 38° Beam

**LED**  
**MR16-HPLED-WH**

- 80lm/W • 480 total lm
- 6Watts • 3,000K • CRI>80 • 38° Beam

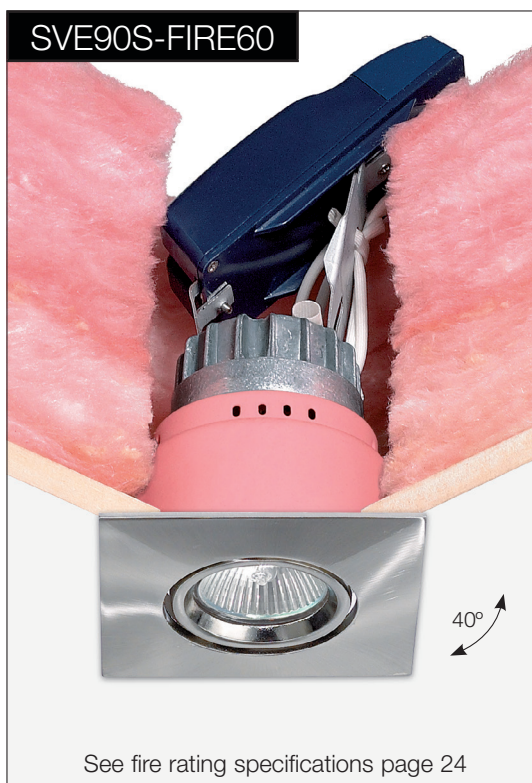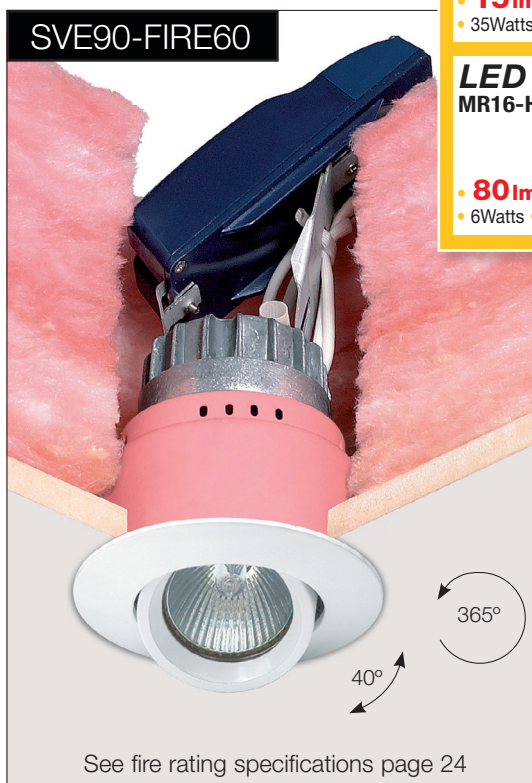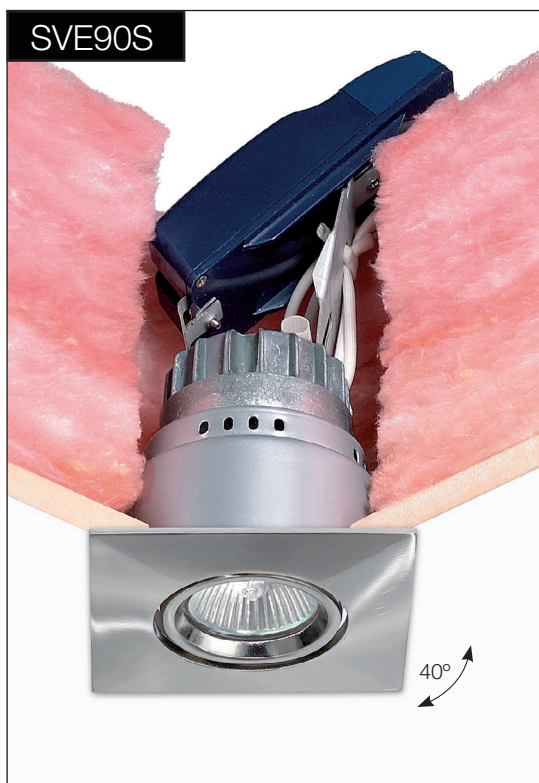

MODEL	CLASS	AIR / MOISTURE TRANSFER	INSULATION	F		CAVITY DEPTH	SIDE CLEARANCE
SVE90S	CA135	Closed	Side Abutted	Yes	90mm	210mm	50mm
SVE90-FIRE60	CA135	Closed	Side Abutted	Yes	90mm	210mm	50mm
SVE90S-FIRE60	CA135	Closed	Side Abutted	Yes	90mm	210mm	50mm