



Exterior Residential
LED Lighting Solutions

EVER  GREEN

Energy Efficient Lighting

Exterior Wall Lights

Up/Down Range

iWave

19460
EV-iWAVE
2x3W 240V Silver
2700K Warm White

19461
EV-iWAVE
2x3W 240V Silver
6500K White

(H) 170mm
(Top W) 65mm
(Bottom W) 90mm




IP65

xWave

19462
EV-xWAVE
2x4W 240V Silver
2700K Warm White

19463
EV-xWAVE
2x4W 240V Silver
6500K White

(H) 195mm
(W) 87mm

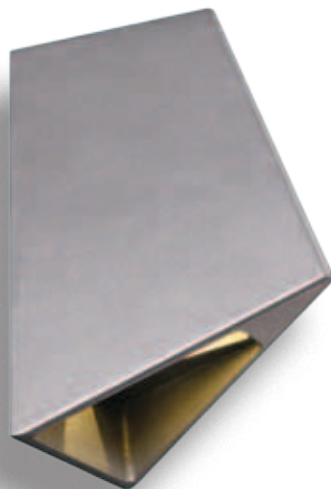

IP65

iBook

19464
EV-iBOOK
2x3W 240V Silver
2700K Warm White

19465
EV-iBOOK
2x3W 240V Silver
6500K White

(H) 218mm
(W) 50mm



IP65



Exterior Wall Lights

Anodised Range.

Anodised Aluminium Versus Stainless Steel?

Anodising is an electrochemical process that thickens and toughens the naturally occurring protective oxide. In other words, anodising “weathers” the surface, so it is tough enough to withstand the rigors of a marine environment.

Unlike Stainless Steel, anodising allows the aluminium to maintain its metallic appearance, and will not tea stain or rust. Anodised coatings are corrosion resistant, will not chip or peel and resists ultraviolet (UV) radiation so colours will not fade, even in direct sunlight.

Elite/1

19404

EV-ELITE-1-WW
Down 6W 240V GU10
Silver Sand Anodised
3600K Warm White

19405

EV-ELITE-1-W
Down 6W 240V GU10
Silver Sand Anodised
5500K White

Back plate: (Ø) 80mm
(D) 40mm
Body: (Ø) 65mm
(L) 135mm

Elite/2

19406

EV-ELITE-2-WW
Up/Down 2x6W 240V GU10
Silver Sand Anodised
3600K Warm White

19407

EV-ELITE-2-W
Up/Down 2x6W 240V GU10
Silver Sand Anodised
5500K White

Back plate: (Ø) 80mm
(D) 40mm
Body: (Ø) 65mm
(L) 190mm

Alpha/1

19400

EV-ALPHA-1-WW
Down 6W 240V GU10
Silver Sand Anodised
3600K Warm White

19401

EV-ALPHA-1-W
Down 6W 240V GU10
Silver Sand Anodised
5500K White

Back plate: (L) 68mm
(W) 68mm
(D) 25mm
Body: (L) 135mm
(W) 62mm
(D) 62mm

Alpha/2

19402

EV-ALPHA-2-WW
Up/Down 2x6W 240V GU10
Silver Sand Anodised
3600K Warm White


19403

EV-ALPHA-2-W
Up/Down 2x6W 240V GU10
Silver Sand Anodised
5500K White

Back plate: (L) 68mm
(W) 68mm
(D) 25mm
Body: (L) 200mm
(W) 62mm
(D) 62mm



Lamp/s Included.

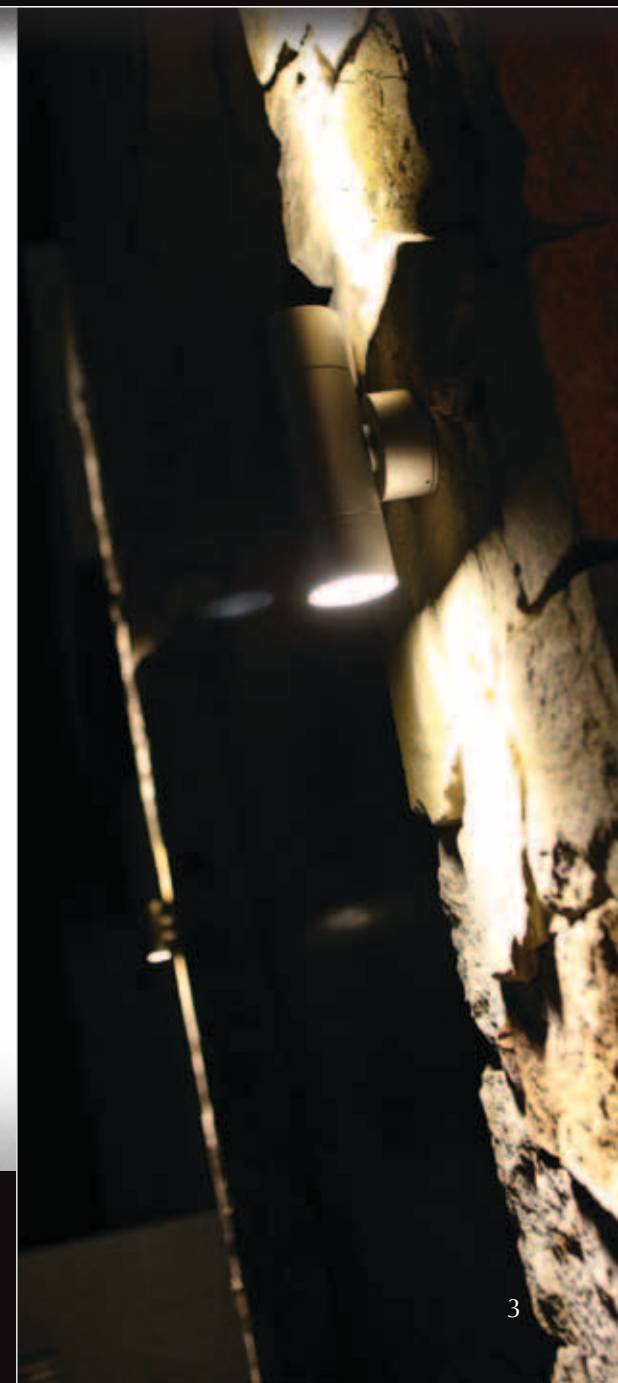

Exterior Wall Lights

Anodised Range.

Got a large wall to light up?

Elite/3

19476

EV-ELITE/3

Up/Down 2x9W 240V

Black Anodised

2700K Warm White

19478

EV-ELITE/3

Up/Down 2x9W 240V

Silver Sand Anodised

2700K Warm White

19477

EV-ELITE/3

Up/Down 2x9W 240V

Black Anodised

6500K White

19479

EV-ELITE/3

Up/Down 2x9W 240V

Silver Sand Anodised

6500K White

(H) 260mm

(W) 120mm

(D) 160mm



IP65

Exterior Step Lights - Recessed

Ixis Recessed

19466
EV-IXIS-REC
2W 240V Silver
2700K Warm White

19467
EV-IXIS-REC
2W 240V Silver
6500K White

(H) 108mm Cutout Size: Plaster board (W) 92mm x (H) 92mm
(W) 108mm Concrete using housing (W) 96mm x (H) 92mm
(D) 60mm



IP65

Blade

19484
EV-BLADE
3W 240V Silver
2700K Warm White

19485
EV-BLADE
3W 240V Silver
6500K White


(H) 210mm
(W) 48.5mm
(D) 68mm

Cutout Size:
Plaster board (W) 42mm x (H) 185mm
Concrete using housing (W) 45mm x (H) 185mm



IP65

Note: Concrete housing included with fitting.

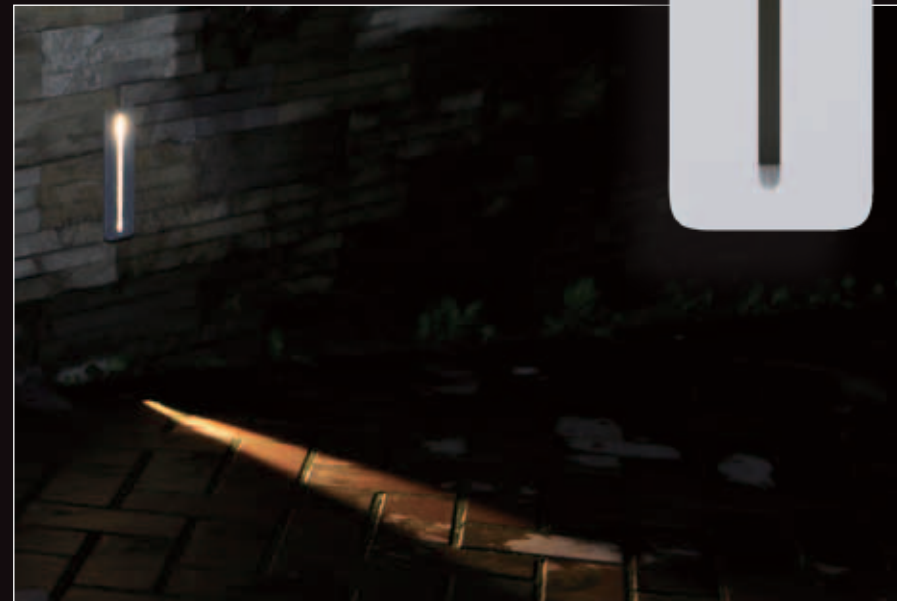

Exterior Step Lights - Recessed

Step

19472
EV-STEP
4W 240V Silver
2700K Warm White

19473
EV-STEP
4W 240V Silver
6500K White

(H) 150mm
(W) 150mm
(D) 65mm

Cutout Size: Plaster board (W) 95mm x (H) 70mm
Concrete using housing (W) 100mm x (H) 70mm



IP65

Step Wide

19474
EV-STEP WIDE
4W 240V Silver
2700K Warm White

19475
EV-STEP WIDE
4W 240V Silver
6500K White

(H) 64mm
(W) 220mm
(D) 65mm

Cutout Size: Plaster board (W) 202mm x (H) 45mm
Concrete using housing (W) 203mm x (H) 52mm



IP65



Note: Concrete housing included with fitting.

Exterior Step Lights – Recessed

Anodised Range.

ME Round

19975

EV-ME-RND-WW
3W 700mA
Silver Sand Anodised
3200K Warm White

19974

EV-ME-RND-W
3W 700mA
Silver Sand Anodised
6400K White

700mA Constant Current LED Driver Required

Ø 63mm
(L) 44mm

Cutout Size: Plaster board (Ø) 53mm
Concrete using housing (Ø) 60mm

IP65



Note: Concrete housing included with fitting.

ME Square

19977

EV-ME-SQR-WW
3W 700mA
Silver Sand Anodised
3200K Warm White

19976

EV-ME-SQR-W
3W 700mA
Silver Sand Anodised
6400K White

700mA Constant Current LED Driver Required

(H) 70mm
(W) 70mm
(D) 44mm

Cutout Size: Plaster board (Ø) 53mm
Concrete using housing (Ø) 60mm

IP65



Exterior Step Lights – Recessed

Deka

Inground 3W 12V DC
Silver Sand Anodised
Eyelid

19436
EV-DEKA-EYELID-WW
2700K Warm White

19437
EV-DEKA-EYELID-W
6500K White

Ø 88mm
(D) 95mm

Cutout Size: Plaster board (Ø) 70mm
Concrete using housing (Ø) 80mm

12V DC Constant Voltage LED Driver Required



IP67

Eyeled


19496
EV-EYE-LED
3W 700mA
Silver Sand Anodised
2700K Warm White

19497
EV-EYE-LED
3W 700mA
Silver Sand Anodised
6500K White

700mA Constant Current LED Driver Required

Ø40mm
(D) 62.5mm

Cutout Size: Plaster board (Ø) 33mm
Concrete using housing (Ø) 37mm

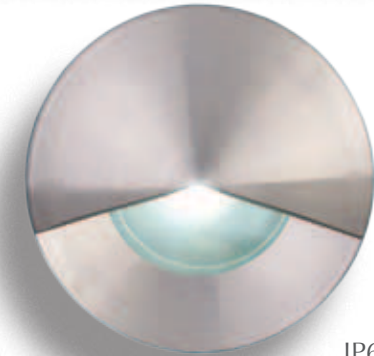

IP65

Deka Brass

Inground 3W 12V DC
Brass
Eyelid

19450
EV-DEKA-BRS-EYELID-WW
2700K Warm White

19451
EV-DEKA-BRS-EYELID-W
6500K White

Ø 88mm
(D) 95mm

Cutout Size: Plaster board (Ø) 70mm
Concrete using housing (Ø) 80mm



IP67

Eyeled Brass


19494
EV-EYE-LED-BRS
3W 700mA Brass
2700K Warm White

19495
EV-EYE-LED-BRS
3W 700mA Brass
6500K White

700mA Constant Current LED Driver Required

Ø40mm
(D) 62.5mm

Cutout Size: Plaster board (Ø) 33mm
Concrete using housing (Ø) 37mm

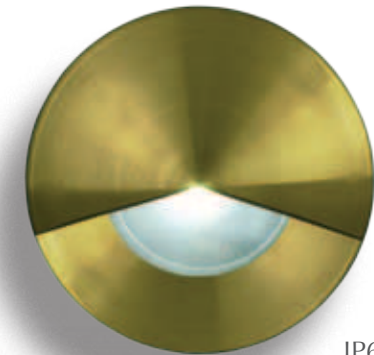

IP65

*Note: Concrete housing
included with fitting.*




Exterior Step Lights - Surface Mounted

Ixis Round Surface Mount

19468
EV-IXIS-SM-RND
2W 240V Silver
2700K Warm White

19469
EV-IXIS-SM-RND
2W 240V Silver
6500K White

Ø 140mm
(D) 48mm IP65

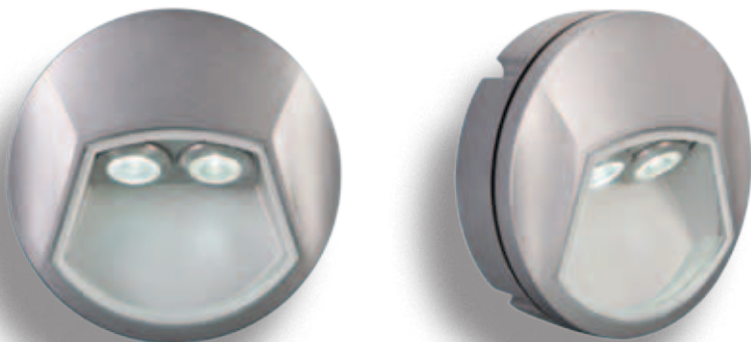


Ixis Square Surface Mount

19470
EV-IXIS-SM-SQR
2W 240V Silver
2700K Warm White

19471
EV-IXIS-SM-SQR
2W 240V Silver
6500K White

(H) 160mm
(W) 136mm
(D) 52mm IP65

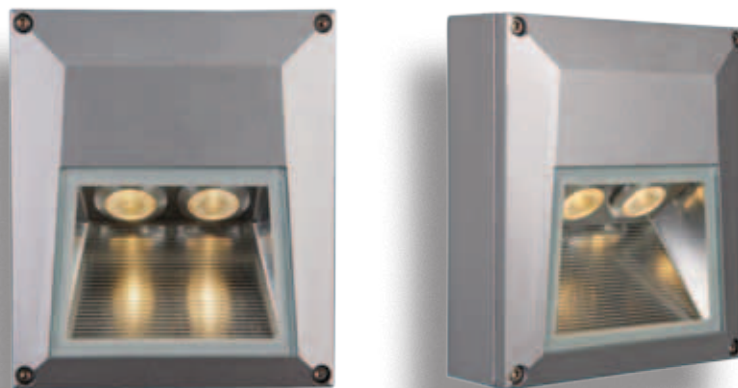

Exterior Step Lights - Surface Mounted

ME Round Surface Mount

19978
EV-ME-SM-RND-WW
3W 240V
Silver Sand Anodised
3200K Warm White

700mA Driver included

Ø 100mm
(D) 40mm

19979
EV-ME-SM-RND-W
3W 240V
Silver Sand Anodised
6400K White



IP65

ME Square Surface Mount

19980
EV-ME-SM-SQR-WW
3W 240V
Silver Sand Anodised
3200K Warm White


700mA Driver included

(H) 134mm
(W) 70mm
(D) 39mm

19981
EV-ME-SM-SQR-W
3W 240V
Silver Sand Anodised
6400K White



IP65

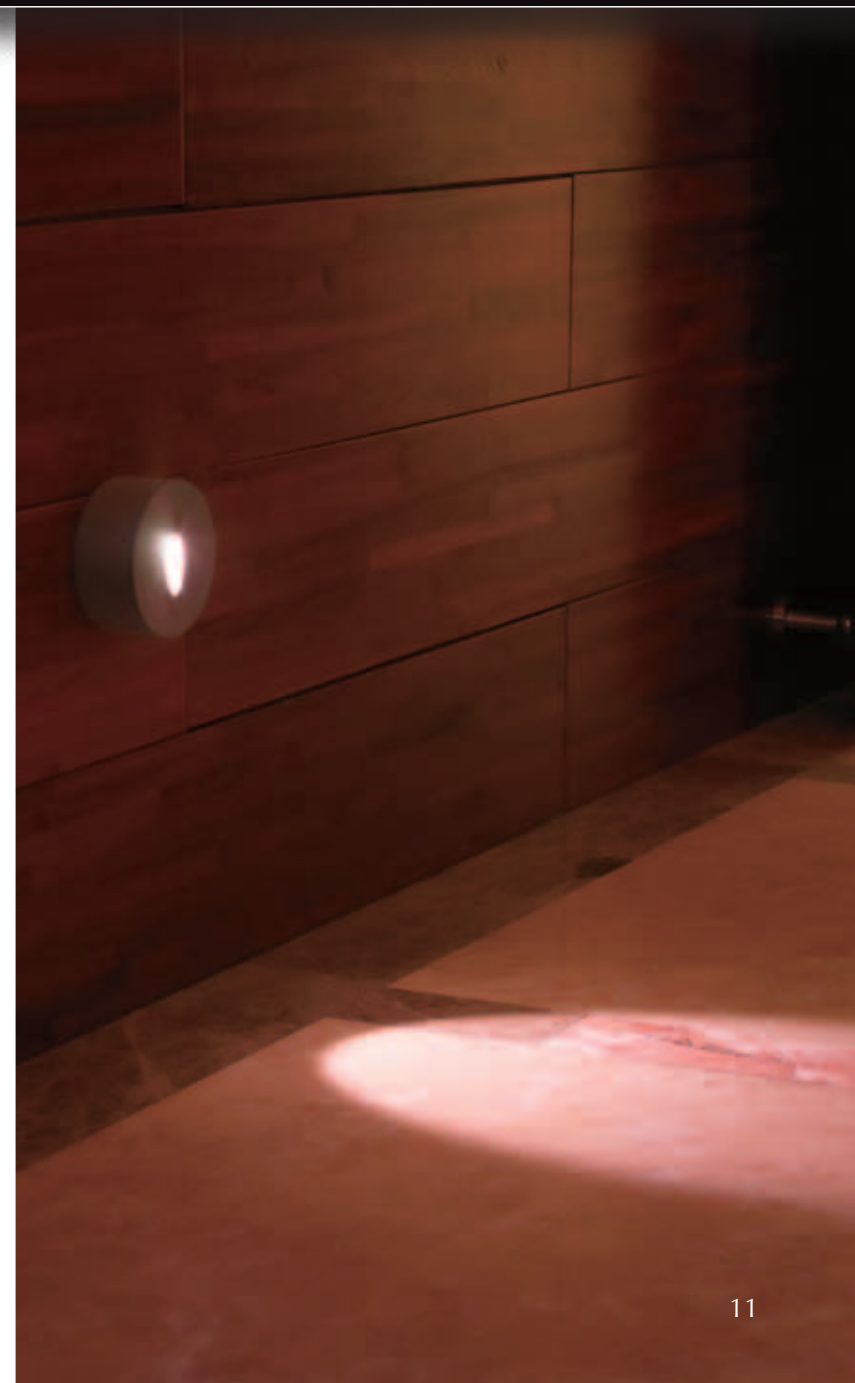

Exterior Garden Lights

Elite Spike

19501
EV-ELITE-SPIKE-WW
Spike 6W 12V DC
Silver Sand Anodised
3600K Warm White

19500
EV-ELITE-SPIKE-W
Spike 6W 12V DC
Silver Sand Anodised
5500K White

12V DC Constant Voltage LED Driver Required

Overall height: 280mm (head and spike)
Head length: 110mm
Front face diameter: 59mm

Lamp included.




Emit Spike


21441
EV-EMIT-WW-F
Spike 1W 12V DC
316 Stainless Steel
3200K Warm White

21440
EV-EMIT-W-F
Spike 1W 12V DC
316 Stainless Steel
6400K White

12V DC Constant Voltage LED Driver Required

Overall height: 520mm (head and spike)
Head length: 49mm
Front face diameter: 42mm

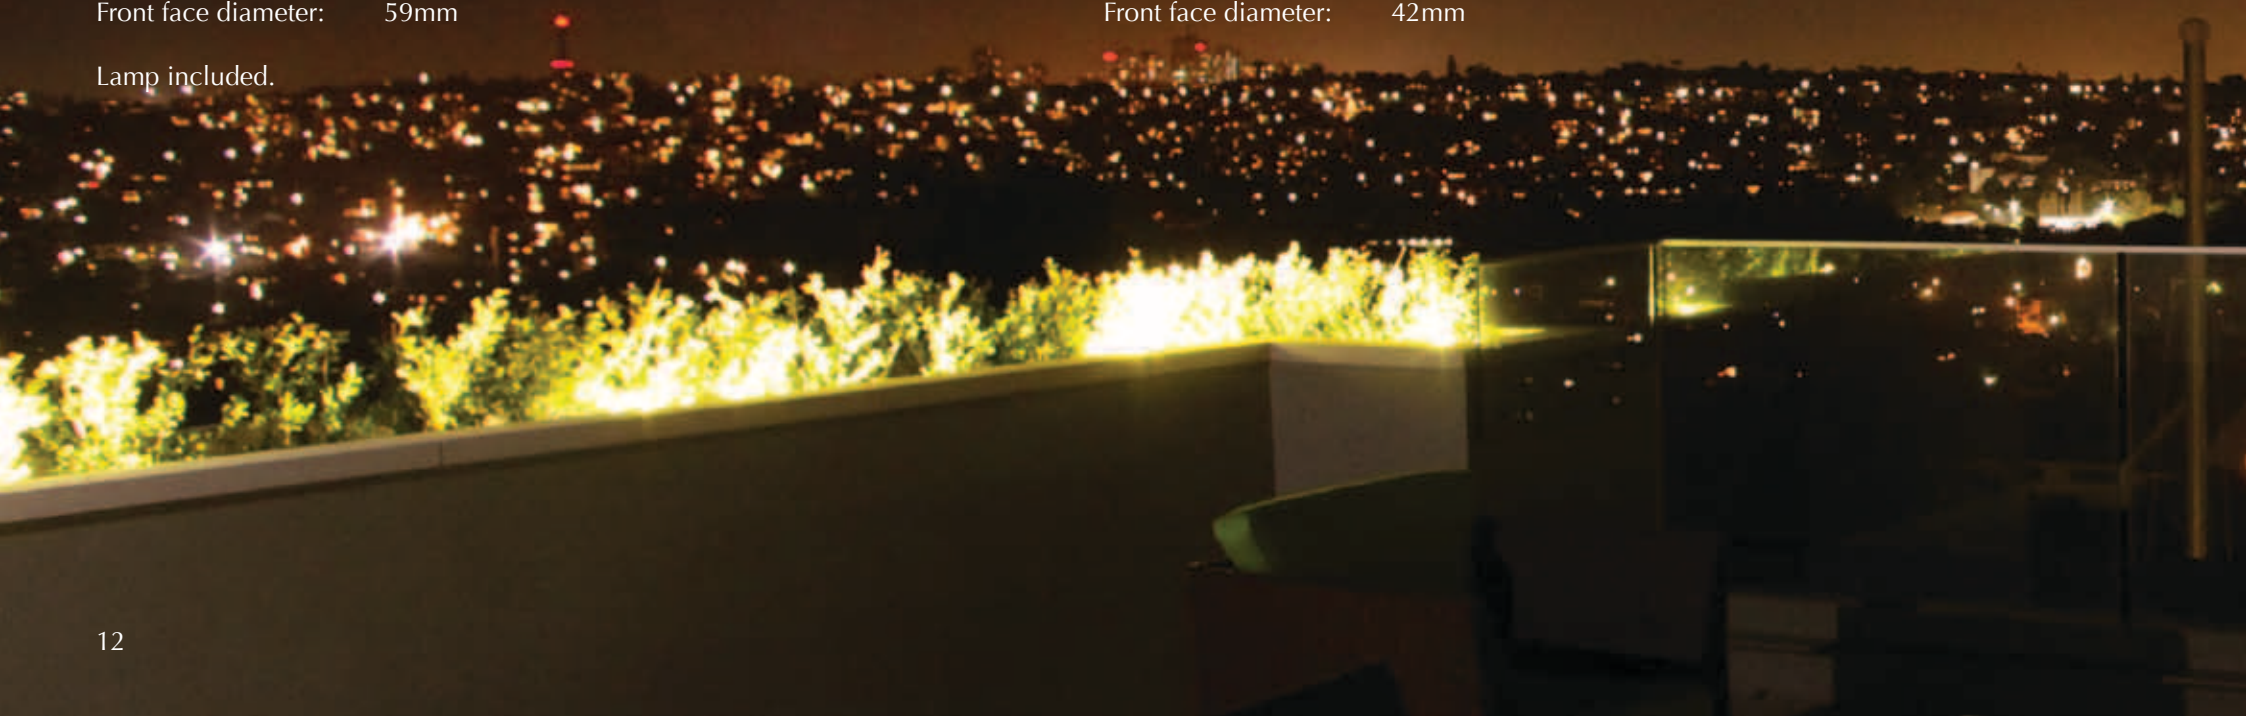

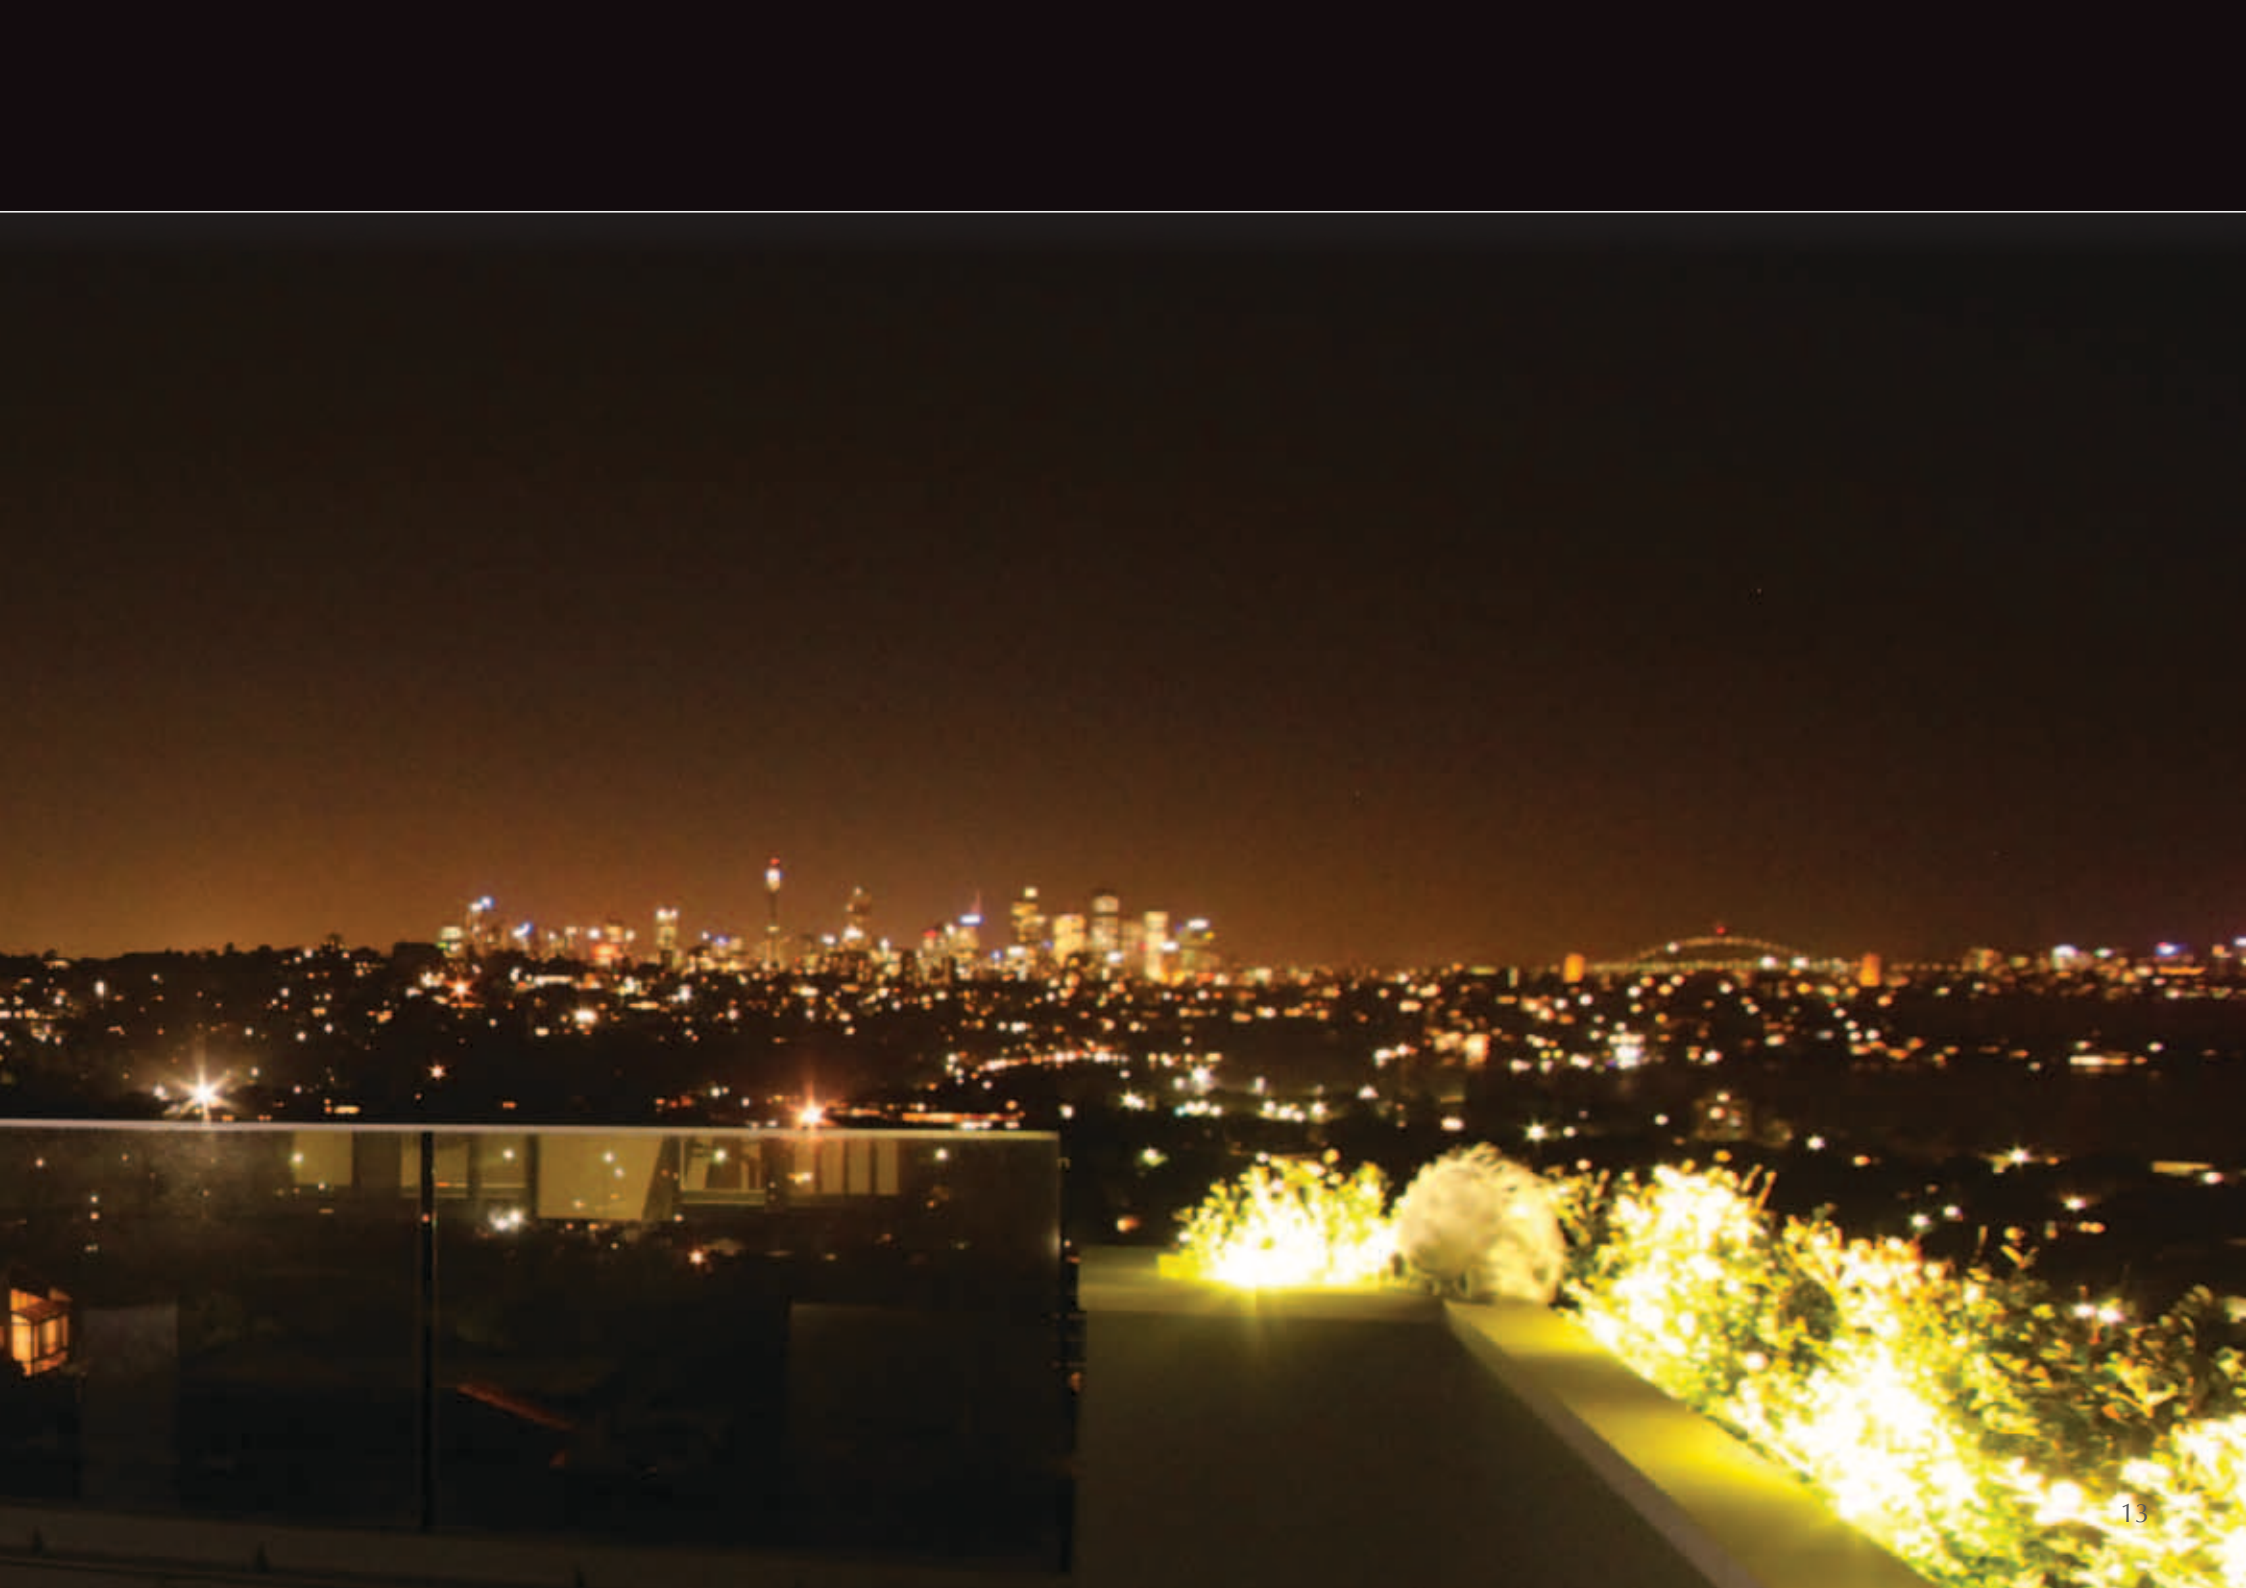

Exterior Garden Lights

Anodised Range.

ME Square Bollard

19505
EV-ME-BOL-SQR-WW
Bollard 3W 12V DC
Silver Sand Anodised
3200K Warm White

19504
EV-ME-BOL-SQR-W
Bollard 3W 12V DC
Silver Sand Anodised
6400K White

(H) 500mm
(W) 63mm
(D) 63mm

12V DC Constant Voltage LED Driver Required



IP65

ME Round Bollard

19503
EV-ME-BOL-RND-WW
Bollard 3W 12V DC
Silver Sand Anodised
3200K Warm White

19502
EV-ME-BOL-RND-W
Bollard 3W 12V DC
Silver Sand Anodised
6400K White

(H) 500mm
(D) 63mm

12V DC Constant Voltage LED Driver Required



IP65



Exterior Garden Lights

Anodised Range.

LED520

20776

LED520-WW
Bollard 4W 12V DC
Silver Sand Anodised
3600K Warm White

20775

LED520-W
Bollard 4W 12V DC
Silver Sand Anodised
6400K White

(H) 595mm
Ø 63mm

12V DC Constant Voltage LED Driver Required



Exterior Inground Lights

Anodised Range.

For a decent amount of light...

Deka

Inground 3W 12V DC
Silver Sand Anodised
12V DC Constant Voltage LED Driver Required

Cutout Size: Timber Deck (Ø) 70mm
Concrete using housing (Ø) 80mm

Round

19424
EV-DEKA-RND-WW
2700K Warm White



19425
EV-DEKA-RND-W
6500K White

IP67

Ø 88mm
(D) 75mm

Square

19426
EV-DEKA-SQR-WW
2700K Warm White



19427
EV-DEKA-SQR-W
6500K White

IP67

(W) 88mm
(D) 75mm

One Way

19428
EV-DEKA-1-WAY-WW
2700K Warm White



19429
EV-DEKA-1-WAY-W
6500K White

IP67

Ø 88mm
(D) 95mm

Two Way

19430
EV-DEKA-2-WAY-WW
2700K Warm White



19431
EV-DEKA-2-WAY-W
6500K White

IP67

Ø 88mm
(D) 95mm

Three Way

19432
EV-DEKA-3-WAY-WW
2700K Warm White



19433
EV-DEKA-3-WAY-W
6500K White

IP67

Ø 88mm
(D) 95mm

Four Way

19434
EV-DEKA-4-WAY-WW
2700K Warm White



19435
EV-DEKA-4-WAY-W
6500K White

IP67

Ø 88mm
(D) 95mm

Exterior Inground Lights

For a decent amount of light...

Deka Brass

Inground 3W 12V DC
Solid Brass Trim Cover
12V DC Constant Voltage LED Driver Required

Cutout Size: Timber Deck (Ø) 70mm
Concrete using housing (Ø) 80mm

Round

19438
EV-DEKA-BRS-RND-WW
2700K Warm White



IP67

19439
EV-DEKA-BRS-RND-W
6500K White

Ø 88mm
(D) 75mm

Square

19440
EV-DEKA-BRS-SQR-WW
2700K Warm White



IP67

19441
EV-DEKA-BRS-SQR-W
6500K White

(W) 88mm
(D) 75mm

One Way

19442
EV-DEKA-BRS-1-WAY-WW
2700K Warm White



IP67

19443
EV-DEKA-BRS-1-WAY-W
6500K White

Ø 88mm
(D) 95mm

Two Way

19444
EV-DEKA-BRS-2-WAY-WW
2700K Warm White



IP67

19445
EV-DEKA-BRS-2-WAY-W
6500K White

Ø 88mm
(D) 95mm

Three Way

19446
EV-DEKA-BRS-3-WAY-WW
2700K Warm White



IP67

19447
EV-DEKA-BRS-3-WAY-W
6500K White

Ø 88mm
(D) 95mm

Four Way

19448
EV-DEKA-BRS-4-WAY-WW
2700K Warm White



IP67

19449
EV-DEKA-BRS-4-WAY-W
6500K White

Ø 88mm
(D) 95mm

Note: Concrete housing included with fitting.

Exterior Inground Lights

Anodised Range.

For lots of light...



IP67

Modula Round

19420
EV-MODULA-RND-WW
Inground 9W 12/24V DC
Silver Sand Anodised
2700K Warm White

19421
EV-MODULA-RND-W
Inground 9W 12/24V DC
Silver Sand Anodised
6500K White

Ø 125mm
(D) 110mm

12V DC Constant Voltage LED Driver Required



IP67

Modula Square

19422
EV-MODULA-SQR-WW
Inground 9W 12/24V DC
Silver Sand Anodised
2700K Warm White

19423
EV-MODULA-SQR-W
Inground 9W 12/24V DC
Silver Sand Anodised
6500K White

(W) 125mm
(D) 110mm

12V DC Constant Voltage LED Driver Required

Modula Round and Modula Square Cutout Size:

Timber Deck (Ø) 100mm
Concrete using housing (Ø) 106mm

Exterior Deck Lights Anodised Range.

Kita Round

5 Pack Deck Kit C/W Driver
Silver Sand Anodised

19453
EV-KITA-RND-WW
2700K Warm White

19452
EV-KITA-RND-W
6500K White

19454
EV-KITA-RND-B
BLUE

Front Face: 40mm
Overall height: 60mm

Cutout Size: Timber Deck (Ø) 33mm
Concrete using housing (Ø) 37mm

IP65



Kita Square

5 Pack Deck Kit C/W Driver
Silver Sand Anodised

19456
EV-KITA-SQR-WW
2700K Warm White

19455
EV-KITA-SQR-W
6500K White

19457
EV-KITA-SQR-B
BLUE

Front Face: 40mm
Overall height: 60mm

Cutout Size: Timber Deck (Ø) 33mm
Concrete using housing (Ø) 37mm

IP65



Exterior Spot Lights Anodised Range.

Spot2

19480
EV-SPOT/2
Spot 9W 240V
Black Anodised
2700K Warm White

19481
EV-SPOT/2
Spot 9W 240V
Black Anodised
6500K White

19482
EV-SPOT/2
Spot 9W 240V
Silver Sand Anodised
2700K Warm White

19483
EV-SPOT/2
Spot 9W 240V
Silver Sand Anodised
6500K White

(H) 210mm
(W) 80mm
Head Ø 120mm

IP65



EVER GREEN

Energy Efficient Lighting



New South Wales

Head Office:
Domus Lighting
29-31 Richland Street, Kingsgrove
Sydney, NSW 2208, Australia
Phone: (02) 9554 9600
Sales Fax: (02) 9554 9433
Admin Fax: (02) 9554 9061

www.domuslighting.com
sales@domuslighting.com

Queensland

Domus Lighting
Unit 1 / 61-71 Nestor Drive, Meadowbrook
Brisbane, QLD 4131, Australia
Phone: (07) 3200 2222
Sales Fax: (07) 3200 7777

Western Australia

Lanark Trading
7 Pitino Court, Osborne Park
Perth, WA 6017, Australia
Phone: (08) 9446 8922
Sales Fax: (08) 9446 8498

www.lanarktrading.com.au
lanark@lanarktrading.com.au

