




LED GLOBES

## CONVERT SERIES

### LED ES Retrofit Downlight Conversion Kit


- Input voltage: 240V AC 50/60Hz
- Wattage: 10W & 15W
- San'an SMD2835 LED chips
- Power factor: >0.5
- Material: PBT & aluminium
- Suitable for LED ES base downlights
- Ambient temp: -15 to 40°C
- Not suitable for dimming
- Warranty: 3 year replacement (CONVERT2A: 2 year replacement)

**PATENTED ADJUSTABLE  
NECK DESIGN**  
Patent No. 201530218766.2  
Patent No. 201520207373.6

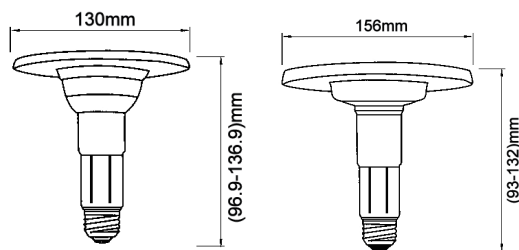

CONVERT2A

CONVERT3,4



PART NO.	DESCRIPTION	BASE	KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	IP RATING	LENGTH (mm)	DIAM (mm)	CARTON QTY
CONVERT2A	10W MATT WH RETROFIT ES	E27	3000	650	10	80	IP20	97-137	Ø130	1/10/20
CONVERT3	15W MATT WH RETROFIT ES	E27	3000	1055	15	80	IP40	93-132	Ø156	1/10/20
CONVERT4	15W MATT WH RETROFIT ES	E27	5000	1100	15	80	IP40	93-132	Ø156	1/10/20