

## CHAM-TOUCH-3C 3 Channel Wall Controller



### Description


The CHAM-TOUCH-3C is an RF + Bluetooth RGBWAC wall control that is to be used with the CHAM-BT-RF-5C receiver. The CHAM-TOUCH-3C wall control allows you to dim the LED strip, change the colour, and speed up or slow down the speed of the changing colour mode. It also allows you to save specific scenes that you use on a regular basis.



### Specification Features

Type of controller:	RGBW touch wall control
Output signal:	RF + Bluetooth
Dimming range:	0.1% - 100%
Colour:	White (Glass)
Dimensions (mm):	(L) 120mm x (W) 75mm x (D) 29.1mm
Cutout (mm):	(L) 70mm x (W) 44mm x (D) 20mm
Transmission frequency:	2.4GHz
Operating temperature:	0-40°C
Power consumption:	< 15mA
Operation voltage:	240V

### Diagrams / Additional

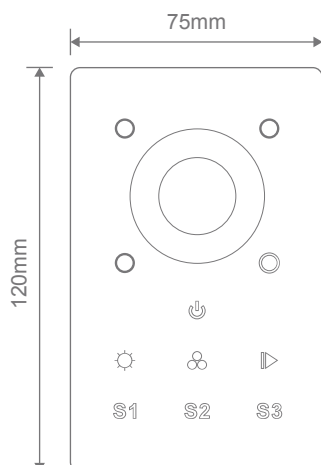

Item No.	Variant
CHAM-TOUCH-3C	20144