



MODES



FULLY LIT



FLAME



BEACON

CHAMA001


Decorative E27 LED flame effect globe

- Input Voltage: 240V
- Wattage: 5W
- 99 pcs of Heng Da LED Chip
- Ambient Temp: -20°C ~ +50°C
- 3 Modes cycle with no memory retention (by turning off and on)
- Great for bars, restaurants and homes
- Perfect to be used with the CLA KEROSIN series

IP
20

2 YEARS
WARRANTY

NON
DIMMABLE

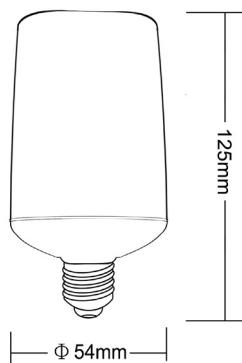

CLA KEROSIN SERIES



Application example

SPECIFICATIONS

CODE	DESCRIPTION	COLOUR TEMP	LUMENS	WATTAGE	BEAM ANGLE	LENGTH mm	DIAM mm	CARTON QTY
CHAMA001	DECORATIVE LED FLAME FEATURE GLOBE ES	1300K	150	5	230°	125	54	1/20