


## Configure your BrilliantSmart App

### Setting up your Home

You can setup multiple homes or locations. Click **'Add Home'** button. Or Click on **'Home'** top left if you are adding or modifying details then **'Home Management'** to setup your home(s), add or rename rooms and share devices.




## Add your Smart Device to your App

- Once safely installed, power on device at wall switch. On initial power-on the smart globe will begin flashing and will be ready to pair. *(If smart globe does not start blinking, turn wall switch OFF/ON 3 times or until light starts to blink rapidly.)*
- Open the BrilliantSmart app, tap **'Add Device'** (if empty room) or **'+'** to add your Smart Globe.
- Select **'Lighting'** in the list of devices.  
If smart globe is blinking rapidly then press **'Confirm indicator rapidly blink'**.




7

- Enter your WiFi password.



Connection will now begin.

- Once connected you'll get a menu **'Adding device succeeded'**. Select the room device and press **'Done'**.  
You can click on the pen to change the device name.
- The smart device can now be controlled by the BrilliantSmart app.



8

## Warning

- To prevent injury, this smart device must be installed safely and correctly.
- Do not open or tamper with smart device. Injury may occur.
- For Indoor use only. Not suitable outdoors.
- Please make sure the smart device is not overloaded.
- Do not allow children to play with wall switch tuning ON/OFF rapidly. This can cause smart device to reset.
- Power surge/power loss could possibly reset smart device. If this happens follow setup instructions.

**NB: BrilliantSmart app screens may differ due to application updates & improvements**

## Disposal

Please dispose of this packaging and product thoughtfully once it has passed its useful life. When your smart device comes to the end of its life or you choose to update or upgrade it, please do not dispose of it with your normal household waste. Please recycle where facilities exist.

When disposing of this fitting, check with your local authority for suitable options.

MADE IN CHINA

2055 02/20 01

9

## Warranty

Brilliant Lighting warrants this product against defects in manufacture and workmanship for a period of 2 Years from date of purchase. Warranty does not include damage or loss arising from incorrect installation, operation or maintenance of this product, damage caused through modification, or incorrect installation.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if goods fail to be of acceptable quality and the failure does not amount to a major failure.

Any claim under this warranty must be made within 2 Years of the date of purchase of the product.

### Exclusions

**GU10 smart globe not included under warranty.**

Refer to our website [brilliantlighting.com.au](http://brilliantlighting.com.au) for terms and conditions and warranty claims.

This warranty is given by:

Brilliant Lighting (Aust) Pty. Ltd.  
ABN 37 006 203 694  
956 Stud Road  
Rowville VIC 3178

Phone: 03 9765 2555

Email: [warranty@brilliantlighting.com.au](mailto:warranty@brilliantlighting.com.au)

MADE IN CHINA

For further Troubleshooting or to connect via AP Mode go to [www.brilliantsmart.com.au](http://www.brilliantsmart.com.au).

10

## Troubleshooting

**Problem:**  
Smart device does not switch ON

Possible Cause	Suggested Solution
No Mains Power	Check connections, fuses and switches

**Problem:**  
Cannot link smart device with BrilliantSmart app

Possible Cause	Suggested Solution
1. Modem signal weak	Place device and modem closer together
2. Router/modem/smart phone firewall is enabled	Disable firewalls on all devices
3. Internet connection is down	Contact your provider
4. BrilliantSmart app not installed correctly	Remove app and re-install

For any other problems connecting your smart device to BrilliantSmart app please visit:

[www.brilliantsmart.com.au/faq](http://www.brilliantsmart.com.au/faq)

### Brilliant Lighting

956 Stud Road  
Rowville Vic 3178 Australia

[www.brilliantlighting.com.au](http://www.brilliantlighting.com.au)

### Australian Sales

T 03 9765 2555

F 1800 817 754 (interstate only)

F 03 9763 0277

E [sales@brilliantlighting.com.au](mailto:sales@brilliantlighting.com.au)

### New Zealand Sales

T 09 974 9618

E [sales@brilliantlighting.co.nz](mailto:sales@brilliantlighting.co.nz)



Brilliant  
SMART

NO HUB REQUIRED



WiFi  
GU10 GLOBES ONLY



Complete with  
2 x Smart WiFi  
RGB+W GU10  
globes to automate  
your home

Voice control



**Cowell Ambient**  
Up/Down Wall Light with  
Smart WiFi GU10 RGB+W globes  
21336/06

works with the  
Google Assistant

works with  
alexa


Works with  
IFTTT

INSTRUCTION MANUAL

11

## Box Content

Cowell x 1 (non-smart)  
Smart GU10 RGB+W LED x 2  
Mounting screws x 2  
Rawl plugs x 2  
Instruction manual x 1

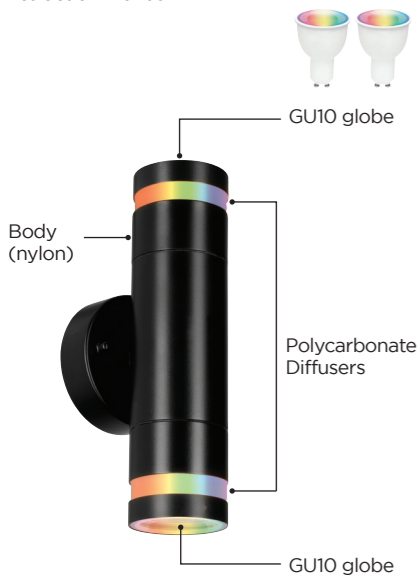

1

## Technical Specifications

**Model No:** 21336/06  
**LED:** RGB+W  
**Colour:** Black  
**Power:** 240VAC , 50Hz  
**Dimensions:** 228 (H) x 96 (L) x 92 (W)  
**Weight:** 280g  
**Light Source:** 2 x Smart WiFi GU10 RGB+W  
5W Max (RED, GREEN, BLUE, WARM WHITE)  
**IP Rating:** IP44  
**Material:** Body - UV Stabilized Nylon,  
Lens - Polycarbonate

### GLOBES ONLY

**LED:** RGB+W  
**Dimming:** via BrilliantSmart App  
**Power:** 5W/Globe  
**Lumens:** 400lm/globe  
**Supply voltage:** 240V AC 50Hz  
**TA:** 0...25°C

**Dimensions:** 56mm x Ø50mm

**Weight:** 30g/Globe

**Security:** Mac Encryption; WEP/WAPI/TKIP/AES

**WiFi Standard:** IEEE802.11b/g/n

**System Req's:** iOS 8.0 or higher, Android 4.1 or higher

2

## Installation

**BEFORE INSTALLATION, PLEASE CHECK THAT THE LOCATION OF THE SMART DEVICE IS WITHIN RANGE OF YOUR HOME WIFI AND SIGNAL IS STRONG (2 BARS).**

### IMPORTANT SAFETY ISSUES

Ensure the power is disconnected before installing. This product is NOT suitable for explosive environments.

Modification of this product will void any warranty. Indoor use only.

Power is to be turned off at existing wall switch prior to installation.

Be sure the smart GU10 is secured into a socket/lamp holder by gently pushing, then a slight twist till GU10 is locked in position clockwise.

Follow the BrilliantSmart app steps.

### Installation

1. Ensure mains supply is switched OFF!
2. Unpack the fixture carefully and dispose of packaging thoughtfully.
3. Remove the mounting base (B) from the light body (A) by unscrewing the two side screws .
4. Drill two holes in the wall using the holes in the mounting plate as a template.
5. Feed 240V supply cable (Licensed Electrician to supply) through Cable entry hole and weather grommet. Secure mounting base (B) to wall using 2 x screws and 2 x Rawl plugs supplied (C).

3


6. Connect the Live (L), Neutral (N) according to the markings on terminal block (D) fix terminal block to hold pins in side mounting base.
7. Refit the light body (A) to the mounting base (B) securing it in place using two screws removed earlier. Tighten the screws firmly.
8. Apply silicone if required around the base plate to maintain IP rating.

### FITTING AND/OR REPLACING

9. Unscrew top diffuser (A1) and Bottom Diffuser (A2) and fit a GU10 type globe (A3) into light body (A). Do not exceed the maximum wattage. (5W max per lamp holder)
10. Reconnect the mains supply.
11. Turn on the wall light.
12. Complete WiFi setup to BrilliantSmart app on following pages.

4

## Installation Diagram

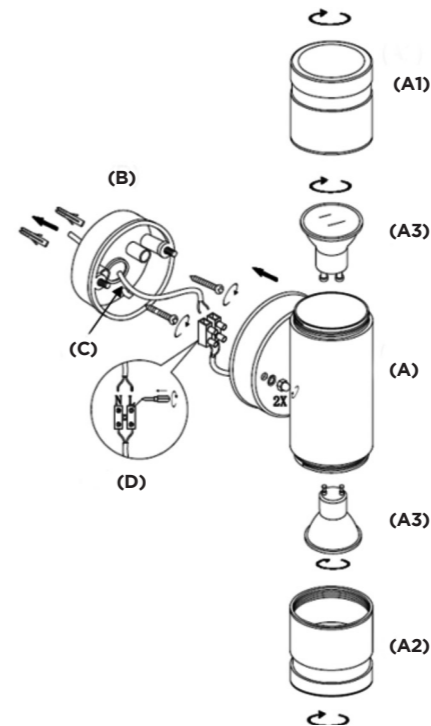

5


## Connect to your WiFi

Ensure your mobile phone is connected to your 2.4GHz WiFi network.

Your mobile phone and your smart device needs to be within good signal strength range of your WiFi router. (Refer to your router specifications for max range.)

## Download the BrilliantSmart App

Please download the free BrilliantSmart app from the App store or Google Play store, or scan the QR code below.



## Register the BrilliantSmart App

Open the BrilliantSmart app.

For new users, register a new account or if existing user, login with your user name and password.

6