



EV3185

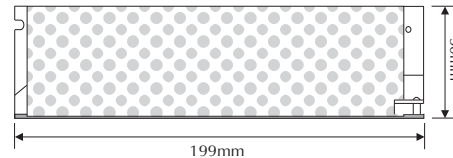

Order Code: **20140**

Product Code: **EV3185**

Description: Constant Voltage LED driver for use on LED MR16 lamps, LED strip lighting, in-ground uplighters and much more.

Data: Output Voltage: 12V DC 150W, Tolerance: 10% \pm , Ripple and noise: 180mV Output Current: 12.5A, Efficiency: 82%, Input frequency: 47-63Hz, Cold start inrush Current: 60A.

Features: Secondary side short circuit protection, thermal overload protection, thermal fuse to ensure safe failure if in areas of excessive temperatures, radio interference suppression in accordance with EN55015, safety and performance in accordance with EN61046, EMC immunity in accordance with EN61547, two year replacement guarantee.

Size: (L) 199mm x (W) 110mm x (H) 50mm

Requires: To be placed in an approved insulated enclosure due to power supply having exposed mains Voltage terminals.

12V DC
output

Constant
Voltage

12.5A
Current

150W max

2 year replacement
warranty

Domus Lighting

29-31 Richland Street Kingsgrove NSW 2208

Phone: (02) 9554 9600 | Fax: (02) 9554 9433 | Email: sales@domuslighting.com