




GAL MULTI / TRI CCT SERIES LED DOWNLIGHTS

LED Changeable Colour Temp Downlights - **3 COLOUR TEMPERATURES IN ONE FITTING**

- Input voltage: 180-265V AC 50/60Hz
- Driver output current: 300mA
- External driver dimensions: 100 x 40 x 22mm
- Distance lead to the driver: 740mm & driver to the fitting: 260mm
- Material: Aluminium alloy
- Power factor: 0.9
- Colour temp changeable: 3000K/4000K/5000K
- Rear switch for easy installation
- CRI: 82
- Ambient temp: -20 to 40°C
- Suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or microwave sensors
- **3 year commercial & 5 year domestic warranty**

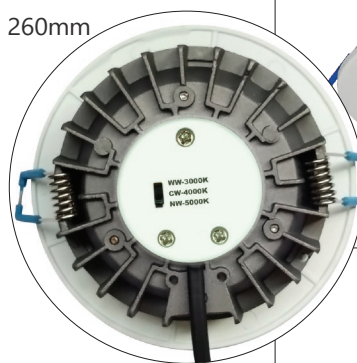

CCT SWITCH



GALMWH01,02



GALMWH03, 04



TILT ANGLE: 15°

GALMWH05 (GIMBAL)



Recommended Dimmers:

Brand	Part No.	PCS PER DIMMER
CLA - Trailing Edge	VELA	GALMWH01: 2-8PCS
CLA - Trailing Edge	LYNX	
Diginet - Ledsmart	MMDM / PB	GALMWH02: 2-8PCS
Diginet - Ledsmart	MMDM / RT	GALMWH03: 2-7PCS
Clipsal - Universal	32ELEDM	GALMWH04: 2-6PCS
Clipsal - Universal	32E450UDM	GALMWH05: 2-8PCS
HPM - Trailing Edge	CAT400T	

PART NO.	DESCRIPTION	KELVIN (K)	LUMENS (LM)	LED Chips	WATT	DIAM (mm)	DEPTH (mm)	CUTOUT (mm)	WEIGHT (KG)	BOX (CM)	CARTON QTY
GALMWH01	D/L LED FIXED DIMM WH RND	3000/4000/5000	700/900/800	36pcs 2835	10	Ø110	50	Ø90	0.35	15x13x6.5	20
GALMWH02	D/L LED FIXED DIMM WH RND	3000/4000/5000	900/1100/1000	44pcs 2835	12	Ø110	50	Ø90	0.35	15x13x7	20
GALMWH03	D/L LED FIXED DIMM WH RND	3000/4000/5000	910/1170/1040	48pcs 2835	13	Ø125	60	Ø110	0.475	14.5x14.5x10	24
GALMWH04	D/L LED FIXED DIMM WH RND	3000/4000/5000	1120/1440/1280	60pcs 2835	16	Ø141	60	Ø125	0.53	16x16x10	24
GALMWH05	D/L LED GIMBAL DIMM WH RND	3000/4000/5000	700/ 900/ 800	36pcs 2835	10	Ø110	50	Ø95	0.40	12.5x12.5x8.5	24

UPDATED ON 12.06.2018