

Thor Pro 32 TRK LED Tracklight



Description

The THOR-PRO-32 LED Range features a family of products with different accessories to be accessible to so many lighting applications while maintaining the same design. Available in a recessed, surface mount and 3-Circuit Track Head Model, part of a matching family of 15W, 23W and 32W models. Ideal for product lighting in shops and displays or even for high-end residential applications. With a 62mm diameter cover and a slimline 170mm long housing made from powder-coated CNC Aluminium and using the latest LED COB Chip and Driver technology, the THOR-PRO-15 series offers stable, flicker-free, low-glare lighting. The added harmonic (flicker-free) filter will minimise and reduce the total harmonic distortion and therefore significantly reduce flicker and any potential strobing effects. Tri-Colour Switchable, 3000K Warm White, 4000K Neutral White and 5000K White colour temperature options. CRI90 for better colour rendition, great for highlighting artwork. Choose from White or Black body and baffle colour options. Available in 15°, 24°, 36° (standard), 45° and 60° Optical Reflector Lens options. Reduce glare with an optional honeycomb Lens, or add colour with Purple, Red, Blue, Green or Yellow Filter Lenses. Backed by a 5 Year Replacement Warranty.




Specification Features

Input Voltage:	240V		
Power (W):	32W		
IP rating (IP):	IP20		
Lumens (lm):	3000K	4000K	5000K
White	2700lm	3100lm	3000lm
Black	2400lm	2600lm	2500lm
LED type:	SMD		
CCT:	3000K - 4000K - 5000K (Switchable)		
CRI:	≥90		
Beam angle (°):	15°, 24°, 36°, 45° & 60° (36° Standard)		
Dimmable:	Yes*		
Lifespan (hrs):	50,000hrs		


*Fully dimmable with suitable dimmers.

Item No.	Variant		CCT
	Wht	Blk	
THOR-PRO-32-TRK	52564	52565	TRIO
THOR-PRO-32-BAF	52579	52580	N/A

Diagrams / Additional

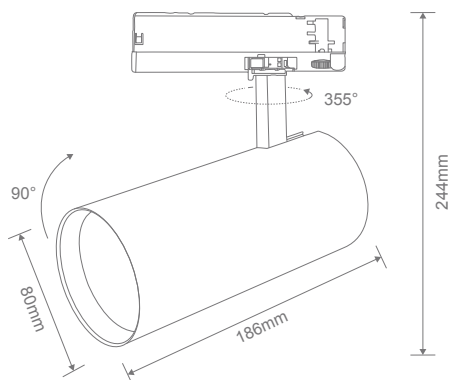

Item No.	Variant			
	60°	45°	24°	15°
THOR-PRO-32-REF	52567	52568	52569	52570

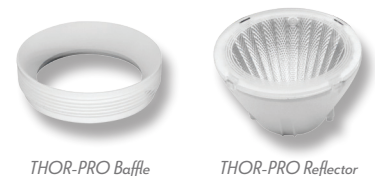

Item No.	Variant					
	Honeycomb	Purple	Red	Blue	Green	Yellow
THOR-PRO-32-LEN	52572	52573	52574	52575	52576	52577

