



PHOENIX SL9775TC - 30W


30 watt LED linkable with 1-10V dimmable functionality and selectable CCT

Application

Decorative commercial service spaces, meeting rooms, amenity areas

Design Specifications

- Extruded rectangular aluminium profile with an opal polycarbonate diffuser
- Choice of white or black finish
- High efficiency LED optics, CRI > 80
- Selectable CCT 3000/4000/5700K, integral 1-10V dimmable LED driver
- Surface mount or suspended, suspension kit (2 off 1800mm drops) incl.
- Optional surface mount, accessories to order (SL9775TC/CLIP - pack of two), max connected units 15 off, optional straight joiner required (SL9775TC/LINK - pack of one), continuous 5m diffuser roll (SL9775TC/DF5)

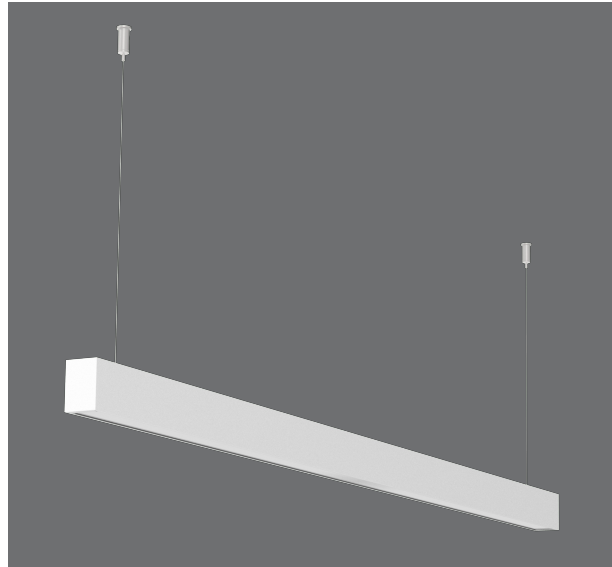









Performance

- Dimmable - **YES**
- Dimmer Type - **1-10V**



Technical Specification


Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SL9775TC/WH	240	30	3100/3300/3300	3000/4000/5700	80
	SL9775TC/BK	240	30	3100/3300/3300	3000/4000/5700	80
	SL9775TC/CLIP					
	SL9775TC/CLIP/BK					
	SL9775TC/LINK					
	SL9775TC/DF5					
	SL9775TC/CNR					
	SL9775TC/CNR/BK					

Beam Angle (°)	Dimmable	Dim (mm)	Body Colour
105	YES	1129(L) x 35(W) x 50(H)	WHITE
105	YES	1129(L) x 35(W) x 50(H)	BLACK
			WHITE
			BLACK
			WHITE
		5000(L)	OPAL WHITE
			WHITE
			BLACK


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

Straight connection installation diagram using SL9775TC/LINK (purchase separately)

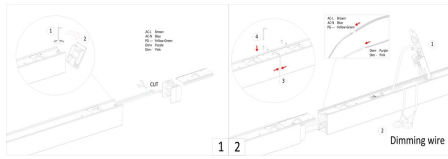

Surface mounted installation using SL9775TC/CLIP (purchase separately)

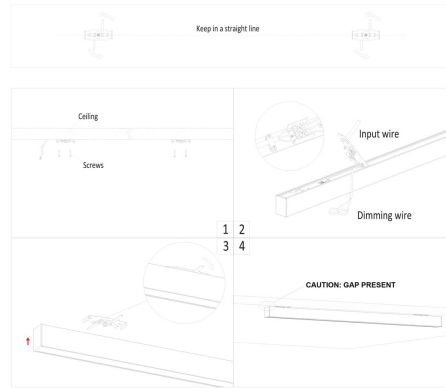

suspended

