

## AT9023 Tri

7W LED Tri-Colour Downlight With Dimmable Driver

### Features

- 90 Degree Beam angle
- Supplied with Dimmable LED Driver
- Ideal for Residential, retail, showroom and decorative



### ORDERING INFORMATION

<b>Order code</b>	10991
<b>Description</b>	7W LED Downlight with Dimmable Driver - 90o beam - White - TRI
<b>Driver Type</b>	Dimmable ( Phase cut)
<b>Item Code</b>	AT9023/WH/TRI

### MECHANICAL

<b>Adjustability</b>	Fixed
<b>Body Material</b>	Aluminium
<b>Diffuser Material</b>	PMMA
<b>Product Finish</b>	Powdercoated
<b>Fitting Colour</b>	White
<b>IC Rating</b>	IC-4

IC-4 rating has been conducted at the products maximum working Temperature Range (C) in line with Australian standards. This provides the required safety when covered with insulation and used in Australian Environments.

<b>Installation Type</b>	Recessed
<b>IP Rating</b>	IP54 Front Face Only

### ELECTRICAL

<b>Electrical Rating</b>	Class II
<b>Input Frequency</b>	50 Hz
<b>Input voltage</b>	230Vac

In Australia the Input voltage is defined as 230Vac -6%/+10%. This effectively means that the voltage range of these products are 216Vac - 253Vac or 240V +6%

<b>Maximum Wattage</b>	7 W
<b>Switch Type</b>	Inline

<b>Working Temp Range</b>	0 to 40 °C
---------------------------	------------

### LAMP

<b>Beam Angle</b>	90 °
<b>CCT Configuration</b>	TRI-CCT
<b>CRI</b>	>90
<b>LED Type</b>	Diffused
<b>Maximum Bulb Wattage</b>	7 W
<b>Number of Lamps</b>	1

### COLOUR TEMPERATURE

Warm White (3000 K)	540 lm
Cool White (4000 K)	620 lm
DayLight (5700 K)	590 lm

### DRIVER

<b>Dimmable</b>	Yes
<b>Driver Included</b>	Yes
<b>Integrated Driver</b>	No
<b>Driver Type</b>	Dimmable ( Phase cut)
<b>Wiring Type</b>	Re-wireable Flex & Plug (2 pin)

## COMPLIANCE

### Standards

AS/NZS 60598.1  
AS/NZS 60598.2.2  
AS/NZS 61347.1  
AS/NZS 61347.2.13  
AS CISPR 15

## WARRANTY

**Commercial Use Warranty** 3 RTB (Total 3 Years)

**Domestic Use Warranty** 3 (Yr) RTB

**VIP Warranty** 2 Onsite, 3 RTB (Total 5 Years)

VIP warranty is available to registered users and is subjected to additional terms and conditions.

## DIMENSIONS


**Cutout** 70 mm

**Product Diameter** 85 mm

**Product Height** 40 mm


## LINE DRAWINGS

### AT9023/TRI


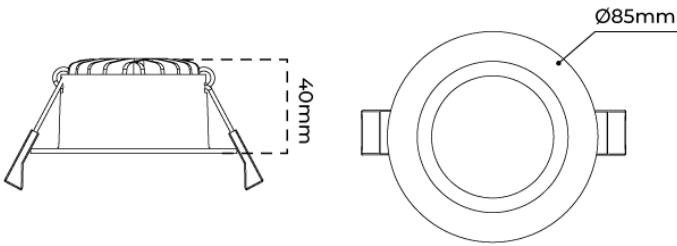


## PHOTOMETRICS

### AT9023/9W/TRI/5700K

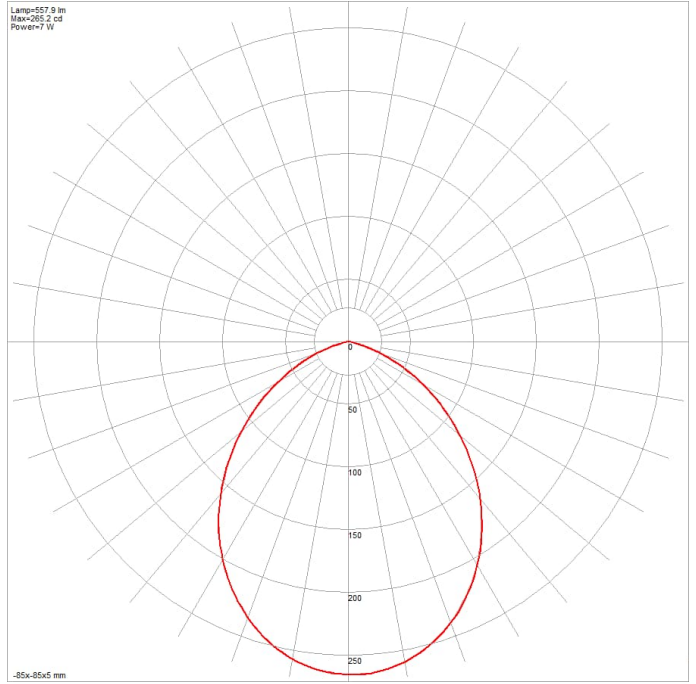

### AT9023/9W/TRI/4000K

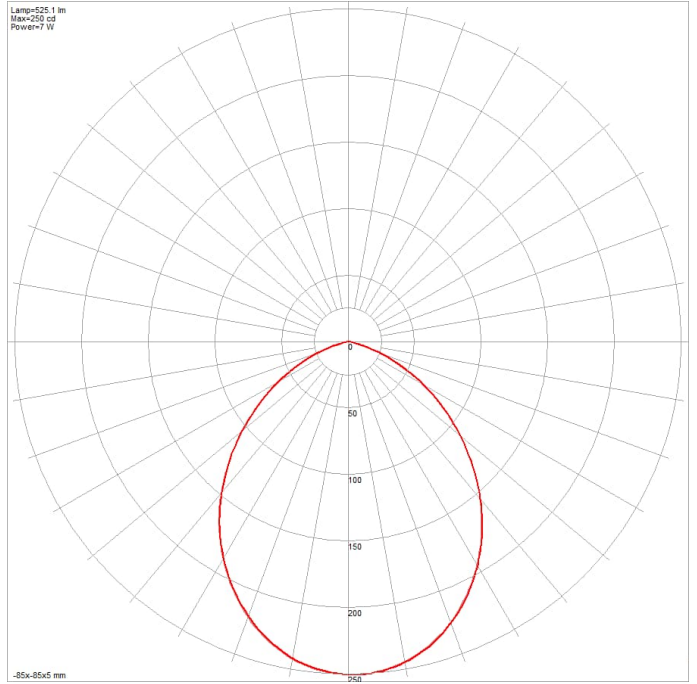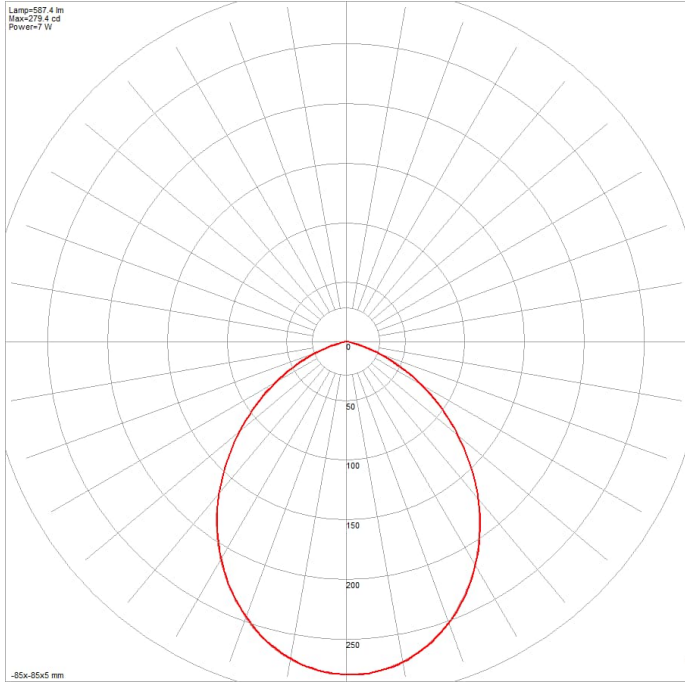

**AT9023/9W/TRI/3000K**