
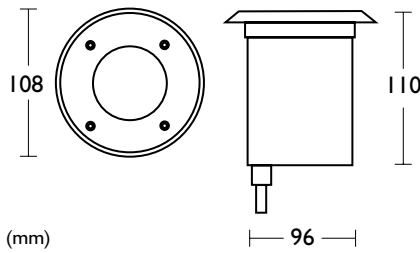


LED Round 'WALK-OVER' Inground Uplight

PRODUCT SPECIFICATIONS

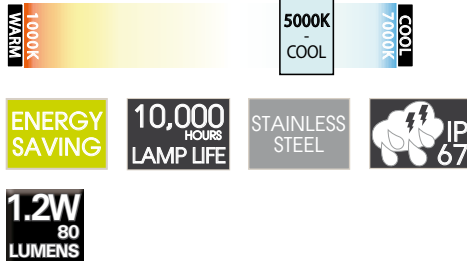

EXST5025

WEIGHT / LIFE

Fitting	700g
LED Lamp Life	10,000HR

PRODUCT FEATURES

- 1.2W LED round 'Walk-Over' inground uplight
- Die-cast aluminium body, powder coated with a pre-treatment for outdoor use
- External housing of thermoplastic material for direct burial is supplied with the fitting
- 6mm thick 316 grade stainless steel rim
- 8mm thick heat tempered safety glass diffuser
- Silicone rubber gasket
- PG11 nickel plated brass gland (allows for through wiring)
- IP67
- Includes 1.2W/12V 12 diode LED array: bluish colour

For DIY installation require LED driver and cable.
(See product codes 24969 & 24970)



ELECTRICAL

Supply Voltage	220-240V AC
Supply Frequency	50-60Hz
Supply Current	0.025A
Power Factor	0.45
Total Input Power	1.2W
Secondary Output Voltage	12V
Secondary Output Current	300mA
Lamp Power	12 x 0.1W

MATERIALS

Body	316 stainless steel
Diffuser	Glass

THERMAL

Ambient Temperature Rating	25°C
Maximum Surface Temp	75°C
Ingress Protection Rating	IP67

OPTICAL / PHOTOMETRIC

Luminous Flux	80 lumens
CRI	>70
Colour Temperature	5000K



REFERENCE	COLOUR	CODE
EXST5025	316 Stainless Steel	24916