


In-ground Uplighters Square

HV1707C 240v LED 5w HV1707W

- In-ground uplighter square
- Stainless steel 316 marine grade cover
- Full stainless steel body
- Flush tempered glass
- Trafficable to 600kg
- Cut out not using plastic canister: 76mm
- Cut out using plastic canister: 90mm
- Face diameter: 100mm
- Installation depth: 175mm
- NOTE: adequate drainage must be allowed
- GU10 35w max
- Cool white, 6000k, 300lm (HV1707C)
- Warm white, 3000k, 250lm (HV1707W)
- IP rating: IP65
- Can be used with a halogen globe

Supplied with a replaceable
5w LED globe

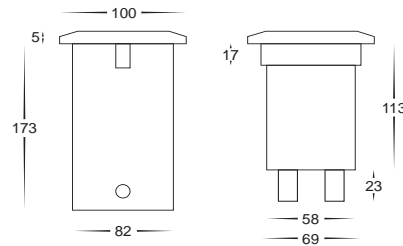

HV1708C 12v LED 5w HV1708W

- In-ground uplighter square
- Stainless steel 316 marine grade cover
- Full stainless steel body
- Flush tempered glass
- Trafficable to 600kg
- Cut out not using plastic canister: 76mm
- Cut out using plastic canister: 90mm
- Face diameter: 100mm
- Installation depth: 175mm
- NOTE: adequate drainage must be allowed
- MR16 20w max
- Cool white, 6000k, 300lm (HV1708C)
- Warm white, 3000k, 250lm (HV1708W)
- IP rating: IP65
- Can be used with a halogen globe
- Must be used with a suitable LED driver (Refer to Pages 153-158)

Supplied with a replaceable
5w LED globe

